

POLYSLICK
UHMW-PE ROD™



Ultra High Molecular Weight Polyethylene Rod – PE 1000





APPLICATIONS


- | | | |
|--------------------|----------------|--------------|
| Gears | Augers | Rollers |
| Spools | Nozzles | Bearings |
| Wear Strips | Wear Guides | Bushings |
| Machine Parts | Shaft Sleeves | Sprockets |
| Bottling Equipment | Conveyor Parts | Change Parts |



Smooth as Extruded

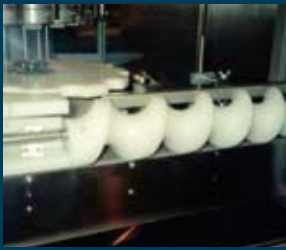

POLYSLICK UHMW-PE ROD™

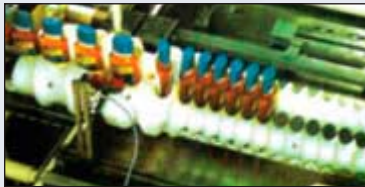

FEATURES

Moisture resistant
 Chemical resistant
 Stress crack resistant
 Low coefficient of friction
 Prevents steel degradation
 Non toxic / Non hazardous

Easy to clean
 Easily machined
 High impact strength
 High energy absorption
 High abrasion resistance
 Reduces machine noise

COLORS

Natural*
 Black

*FDA and USDA approved color. RoHs and REACH Compliant.

SIZES

Ram Extruded
 inch / mm

Diameter 0.25 - 10 / 6 - 250

Length 120 / 3050

FINISH

Smooth as extruded

Note: Charge marks may be visible on surface
 Other lengths, colors and formulations available upon request