


CAN-AM

Roller Chain
Leaf Chain
Sharp Top Chain

SUPPLY SERVICES LTD



Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM Products

visit us at www.can-amchains.com

Standard Roller Chain2 & 3

Heavy Series Roller Chain4

British Standard Roller Chain5

Standard Roller Chain Attachment Links6 & 7

Leaf Chain8 & 9

Double Pitch Roller Chain10

Specialty Roller Chain Products11-13

Sharp Top Roller Chain – ST Series15-18

Sharp Top Roller Chain – SLL Series19-20

Sharp Top Roller Chain – 5 PEP Series21

Sharp Top Roller Chain – W2P/W4P Series22


Sharp Top Roller Chain – 160-1-DP & 32B Series23

Sharp Top Roller Chain – 80-2-4PEP Series24

ANSI STANDARD ROLLER CHAINS are more widely used for power transmission than any other type of chain. They are available in single and multiple strand construction. Double pitch drive chains are an economical choice for many slower speed drives. These chains conform to ANSI standards and are fully interchangeable with chains of like standards. They are equally efficient at low or high speeds and light or heavy loads. They are normally packaged in boxes containing 10' of chain and 1 connector link. Continuous reels of chain are available on request.



CAN-AM ANSI STANDARD ROLLER CHAINS

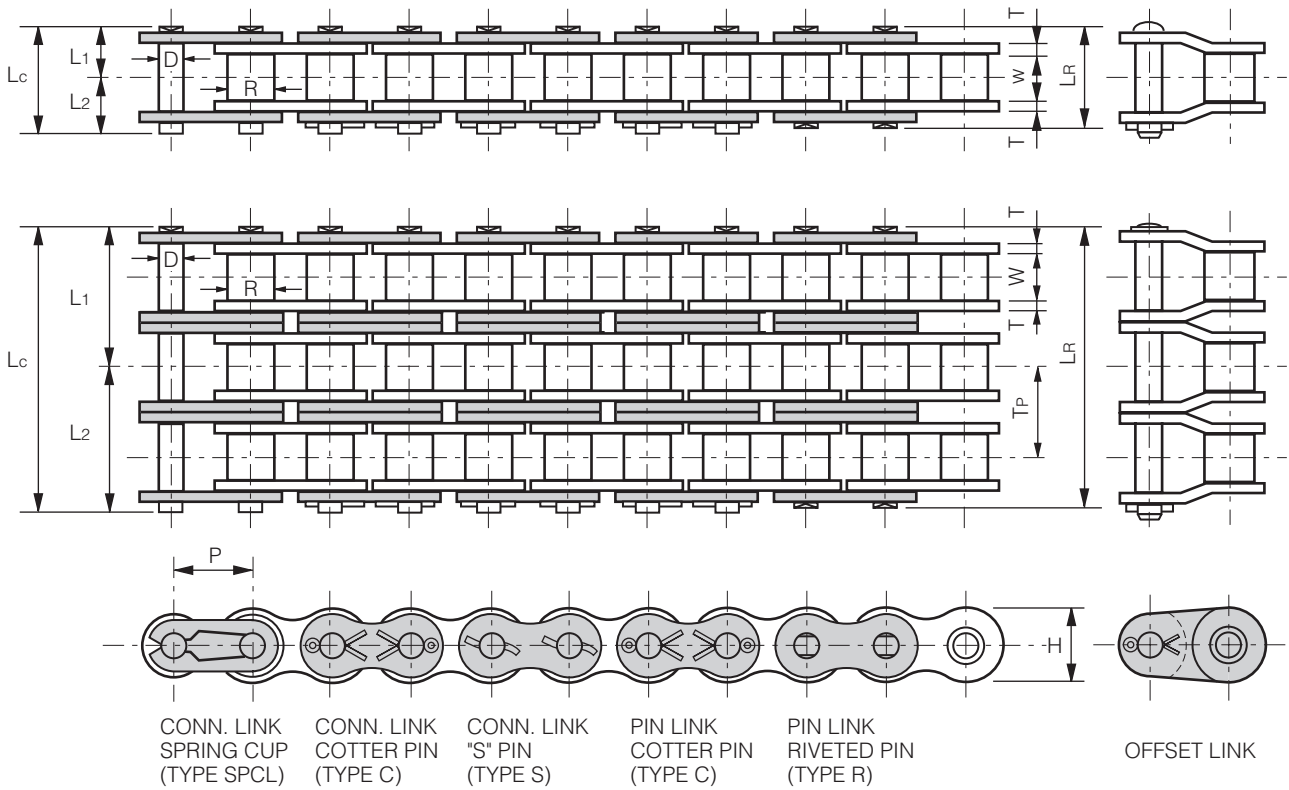

SINGLE STRAND

| Chain Number (ANSI) | Dimensions – Inches | | | | | | | | | | Average Ultimate Strength | Max. Allowable Load | Average Wt. Lbs./ Ft. | Type of Conn. Link |
|---------------------|---------------------|---------|-------|--------|--------|-------|--------|-----------|-------|-------|---------------------------|---------------------|-----------------------|--------------------|
| | Pitch | Roller | | Pin | | | | Plate | | | | | | |
| | | Width | Dia. | Dia. | Length | | Height | Thickness | | | | | | |
| P | W | R | D | LR | Lc | L1 | L2 | H | T | Lbs. | Lbs. | | | |
| * 25 | 1/4 | 1/8 | 0.130 | 0.0905 | 0.296 | 0.327 | 0.148 | 0.179 | 0.230 | 0.030 | 1050 | 140 | .09 | SpCl |
| * 35 | 3/8 | 3/16 | 0.200 | 0.141 | 0.466 | 0.500 | 0.233 | 0.267 | 0.354 | 0.050 | 2400 | 480 | .21 | |
| 41 | 1/2 | 1/4 | 0.306 | 0.141 | 0.532 | 0.579 | 0.266 | 0.313 | 0.382 | 0.050 | 2600 | 500 | .27 | |
| 40 | 1/2 | 5/16 | 0.312 | 0.156 | 0.646 | 0.682 | 0.323 | 0.359 | 0.463 | 0.060 | 4300 | 810 | .41 | |
| 50 | 5/8 | 3/8 | 0.400 | 0.200 | 0.800 | 0.863 | 0.400 | 0.463 | 0.577 | 0.080 | 7200 | 1400 | .68 | |
| 60 | 3/4 | 1/2 | 0.469 | 0.234 | 1.000 | 1.048 | 0.500 | 0.548 | 0.691 | 0.094 | 9900 | 1950 | .96 | |
| 80 | 1 | 5/8 | 0.625 | 0.312 | 1.276 | 1.388 | 0.638 | 0.750 | 0.921 | 0.125 | 17600 | 3300 | 1.70 | C |
| 100 | 1 1/4 | 3/4 | 0.750 | 0.375 | 1.544 | 1.685 | 0.772 | 0.913 | 1.154 | 0.156 | 26400 | 5060 | 2.52 | |
| 120 | 1 1/2 | 1 | 0.875 | 0.437 | 1.942 | 2.095 | 0.971 | 1.124 | 1.382 | 0.187 | 39000 | 6800 | 3.64 | |
| 140 | 1 3/4 | 1 | 1.000 | 0.500 | 2.120 | 2.288 | 1.060 | 1.228 | 1.610 | 0.219 | 50900 | 9000 | 5.00 | |
| 160 | 2 | 1 1/4 | 1.125 | 0.562 | 2.524 | 2.697 | 1.262 | 1.435 | 1.839 | 0.250 | 63200 | 11900 | 6.53 | |
| 180 | 2 1/4 | 1 13/32 | 1.406 | 0.687 | 2.854 | 3.087 | 1.429 | 1.658 | 2.067 | 0.281 | 81500 | 13000 | 9.0 | |
| 200 | 2 1/2 | 1 1/2 | 1.562 | 0.781 | 3.084 | 3.418 | 1.542 | 1.876 | 2.354 | 0.312 | 105500 | 16000 | 10.6 | S |
| 240 | 3 | 1 7/8 | 1.875 | 0.936 | 3.799 | 4.098 | 1.900 | 2.198 | 2.768 | 0.375 | 152000 | 22000 | 15.9 | |

★ Rollerless chain. R indicates bushing diameter.

SUPPLY SERVICES LTD
 Phone 0800 102 112 - www.supplyservices.co.nz

MULTIPLE STRANDS

| Chain Number (ANSI) | Dimensions – Inches | | | | Average Ultimate Strength Lbs | Max. Allowable Load Lbs | Avg. Wt. Lbs./ Ft. |
|---------------------|---------------------|----------------|------------|----------|-------------------------------|-------------------------|--------------------|
| | Pitch | Traverse Pitch | Pin Length | | | | |
| | | | Riv. LR | Conn. Lc | | | |
| | P | TP | LR | Lc | | | |
| 35-2 | 3/8 | 0.398 | 0.864 | 0.906 | 4800 | 810 | 0.4 |
| 35-3 | | | 1.260 | 1.296 | 7200 | 1200 | 0.7 |
| 35-4 | | | 1.664 | 1.697 | 9600 | 1580 | |
| 35-5 | | | 2.062 | 2.091 | 12000 | 1870 | |
| 35-6 | | | 2.460 | 2.495 | 14400 | 2200 | |
| 40-2 | 1/2 | 0.567 | 1.260 | 1.248 | 8600 | 1370 | 0.8 |
| 40-3 | | | 1.764 | 1.815 | 12900 | 2025 | 1.28 |
| 40-4 | | | 2.362 | 2.376 | 17200 | 2670 | 1.70 |
| 40-5 | | | 2.936 | 2.959 | 21500 | 3160 | 2.12 |
| 40-6 | | | 3.502 | 3.522 | 25800 | 3720 | 2.55 |
| 50-2 | 5/8 | 0.712 | 1.504 | 1.583 | 14400 | 2380 | 1.35 |
| 50-3 | | | 2.232 | 2.288 | 21600 | 3500 | 2.08 |
| 50-4 | | | 2.952 | 2.983 | 28800 | 4620 | 2.76 |
| 50-5 | | | 3.668 | 3.707 | 36000 | 5460 | 3.45 |
| 50-6 | | | 4.386 | 4.432 | 43200 | 6440 | 4.14 |
| 60-2 | 3/4 | 0.898 | 1.890 | 1.945 | 19800 | 3315 | 1.9 |
| 60-3 | | | 2.772 | 2.843 | 29700 | 4875 | 3.05 |
| 60-4 | | | 3.716 | 3.727 | 39600 | 6435 | 4.06 |
| 60-5 | | | 4.608 | 4.644 | 49500 | 7600 | 5.07 |
| 60-6 | | | 5.520 | 5.538 | 59400 | 8970 | 6.08 |
| 60-8 | | | 7.282 | 7.373 | 79200 | 12000 | |
| 60-10 | | | 8.180 | 8.271 | 99000 | 14600 | |
| 80-2 | 1 | 1.153 | 2.425 | 2.539 | 35200 | 5610 | 3.82 |
| 80-3 | | | 3.579 | 3.705 | 52800 | 8250 | 5.30 |
| 80-4 | | | 4.742 | 4.863 | 70400 | 10890 | 7.06 |
| 80-5 | | | 5.898 | 6.016 | 88000 | 12870 | 8.81 |
| 80-6 | | | 7.052 | 7.170 | 105600 | 15180 | 10.57 |
| 80-8 | | | 9.354 | 9.471 | 140800 | 20400 | |
| 80-10 | | | 11.660 | 11.777 | 176000 | 24700 | |
| 100-2 | 1 1/4 | 1.409 | 2.950 | 3.102 | 52800 | 8600 | 5.27 |
| 100-3 | | | 4.360 | 4.512 | 79200 | 12650 | 7.91 |
| 100-4 | | | 5.804 | 5.938 | 105600 | 16690 | 10.55 |
| 100-5 | | | 7.206 | 7.347 | 132000 | 19700 | 13.12 |
| 100-6 | | | 8.616 | 8.756 | 158400 | 23200 | 15.78 |
| 100-8 | | | 11.434 | 11.579 | 211200 | 31300 | |
| 100-10 | | | 14.252 | 14.396 | 264000 | 37900 | |


| Chain Number (ANSI) | Dimensions – Inches | | | | Average Ultimate Strength Lbs | Max. Avg. Allowable Load Lbs | Avg. Wt. Lbs./ Ft. |
|---------------------|---------------------|----------------|------------|----------|-------------------------------|------------------------------|--------------------|
| | Pitch | Traverse Pitch | Pin Length | | | | |
| | | | Riv. LR | Conn. Lc | | | |
| | P | TP | LR | Lc | | | |
| 120-2 | 1 1/2 | 1.787 | 3.740 | 3.890 | 78000 | 115600 | 7.86 |
| 120-3 | | | 5.531 | 5.685 | 117000 | 17000 | 11.78 |
| 120-4 | | | 7.328 | 7.481 | 156000 | 22440 | 15.70 |
| 120-5 | | | 9.116 | 9.268 | 195000 | 26520 | 19.59 |
| 120-6 | | | 10.902 | 11.057 | 234000 | 31280 | 23.49 |
| 120-8 | | | 14.468 | 14.364 | 312000 | 42100 | |
| 120-10 | | | 18.042 | 18.209 | 390000 | 51000 | |
| 140-2 | 1 3/4 | 1.925 | 4.055 | 4.224 | 101800 | 15300 | 9.65 |
| 140-3 | | | 5.966 | 6.146 | 152700 | 22500 | 14.90 |
| 140-4 | | | 7.922 | 8.091 | 203600 | 29700 | 19.16 |
| 140-5 | | | 9.848 | 10.016 | 254500 | 35100 | 24.84 |
| 140-6 | | | 11.772 | 11.941 | 305400 | 41400 | 29.77 |
| 140-8 | | | 15.612 | 15.792 | 407200 | 55800 | |
| 140-10 | | | 19.462 | 19.642 | 509000 | 67500 | |
| 160-2 | 2 | 2.303 | 4.828 | 5.000 | 126400 | 20230 | 13.47 |
| 160-3 | | | 7.146 | 7.315 | 189600 | 29750 | 20.17 |
| 160-4 | | | 9.462 | 9.634 | 252800 | 39270 | 26.92 |
| 160-5 | | | 11.764 | 11.941 | 316000 | 46410 | 35.52 |
| 160-6 | | | 14.072 | 14.241 | 329200 | 54740 | 40.27 |
| 160-8 | | | 18.678 | 18.851 | 505600 | 73700 | |
| 160-10 | | | 23.284 | 23.457 | 632000 | 89200 | |
| 180-2 | 2 1/4 | 2.587 | 5.441 | 5.670 | 163000 | 22100 | 17.82 |
| 180-3 | | | 8.051 | 8.276 | 244500 | 32500 | 25.68 |
| 180-4 | | | 10.638 | 10.863 | 326000 | 42900 | 34.20 |
| 180-5 | | | 13.226 | 13.450 | 407500 | 50700 | 42.73 |
| 180-6 | | | 15.814 | 16.037 | 489000 | 59800 | 51.25 |
| 200-2 | 2 1/2 | 2.819 | 5.906 | 6.241 | 211000 | 27200 | 21.50 |
| 200-3 | | | 8.722 | 9.213 | 316500 | 40000 | 32.94 |
| 200-4 | | | 11.548 | 11.906 | 422000 | 52800 | 43.79 |
| 200-5 | | | 14.390 | 14.729 | 527500 | 62400 | 54.64 |
| 200-6 | | | 17.210 | 17.544 | 633000 | 73600 | 58.65 |
| 240-2 | 3 | 3.457 | 7.252 | 7.551 | 304000 | 37400 | 32.32 |
| 240-3 | | | 10.708 | 11.008 | 456000 | 55000 | 48.11 |
| 240-4 | | | 14.166 | 14.465 | 608000 | 72600 | 63.90 |
| 240-5 | | | 17.624 | 17.922 | 760000 | 85800 | 79.70 |
| 240-6 | | | 21.082 | 21.379 | 912000 | 101200 | 95.49 |

SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM HEAVY-SERIES ROLLER CHAINS

H-series roller chains provide greater shock and wear resistance as well as offering a 10 to 20% higher breaking strength than regular roller chain. The side plate thickness is equal to the next larger ANSI roller chain and incorporates through-hardened high-tensile steel pins. These chains deliver higher power transmission capacity than standard chain using the same space.

Single roller chains in this series run on standard single roller chain sprockets.

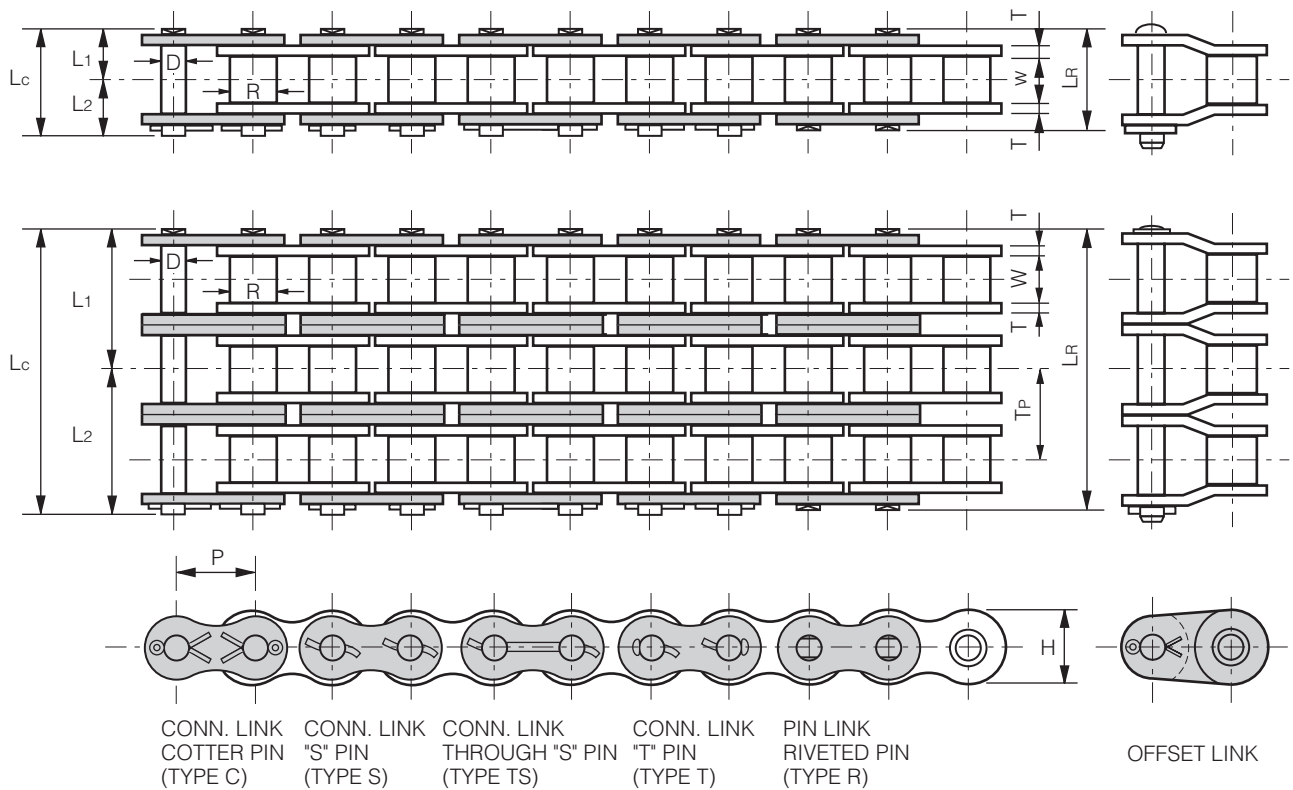


SINGLE STRAND

| Chain Number (ANSI) | Dimensions – Inches | | | | | | | | | | Average Ultimate Strength Lbs | Average Weight Lbs/Ft | Type of Conn. Link |
|---------------------|---------------------|---------|-------|-------|--------|-------|-------|--------|-----------|-------|-------------------------------|-----------------------|--------------------|
| | Pitch | Roller | | Pin | | | | Plate | | | | | |
| | | Width | Dia. | Dia. | Length | | | Height | Thickness | | | | |
| P | W | R | D | LR | LC | L1 | L2 | H | T | Lbs | Lbs/Ft | Link | |
| 60H | 3/4 | 1/2 | 0.469 | 0.234 | 1.130 | 1.221 | 0.565 | 0.656 | 0.691 | 0.125 | 12300 | 1.21 | C |
| 80H | 1 | 5/8 | 0.625 | 0.312 | 1.398 | 1.528 | 0.699 | 0.829 | 0.921 | 0.156 | 20200 | 1.89 | C |
| 100H | 1 1/4 | 3/4 | 0.750 | 0.375 | 1.662 | 1.800 | 0.831 | 0.969 | 1.154 | 0.187 | 30800 | 2.78 | C |
| 120H | 1 1/2 | 1 | 0.875 | 0.437 | 2.072 | 2.244 | 1.036 | 1.208 | 1.382 | 0.219 | 41800 | 3.92 | C |
| 140H | 1 3/4 | 1 | 1.000 | 0.500 | 2.244 | 2.426 | 1.122 | 1.304 | 1.610 | 0.250 | 54200 | 5.65 | C |
| 160H | 2 | 1 1/4 | 1.125 | 0.562 | 2.666 | 2.870 | 1.333 | 1.537 | 1.839 | 0.281 | 68700 | 7.30 | C |
| 180H | 2 1/4 | 1 13/32 | 1.406 | 0.687 | 2.980 | 3.213 | 1.490 | 1.723 | 2.067 | 0.312 | 83700 | 10.20 | C |
| 200H | 2 1/2 | 1 1/2 | 1.562 | 0.781 | 3.343 | 3.681 | 1.671 | 2.010 | 2.354 | 0.375 | 117000 | 12.00 | S |
| 240H | 3 | 1 7/8 | 1.875 | 0.936 | 4.338 | 4.634 | 2.169 | 2.465 | 2.768 | 0.500 | 163100 | 21.70 | S |

SUPPLY SERVICES LTD 
Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM BRITISH STANDARD ROLLER CHAINS

BS standard roller chains are standardized in accordance with ISO 606 "B" and fully interchangeable with chains manufactured according to BS 228 and DIN 8187. Supplied, in rivet type, to European countries as well as for replacement on machinery employing BS standard chains.

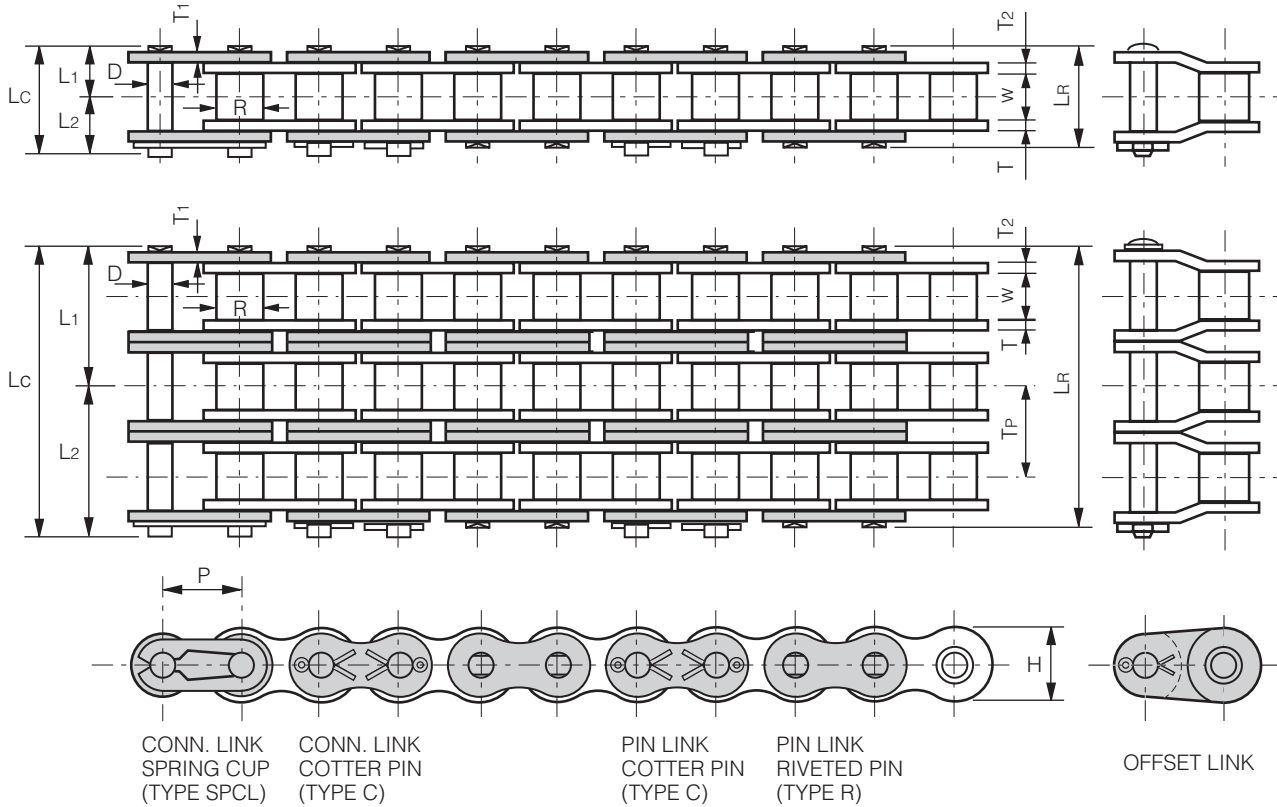


SINGLE STRAND

| Chain Number (BS) | Dimensions – Inches | | | | | | | | | | | Minimum Ultimate Strength | Average Weight | Type of Conn. Link |
|-------------------|---------------------|--------|-------|-------|--------|-------|-------|--------|-----------|-------|-------|---------------------------|----------------|--------------------|
| | Pitch | Roller | | Pin | | | | | Plate | | | | | |
| | | Width | Dia. | Dia. | Length | | | Height | Thickness | | | | | |
| P | W | R | D | LR | LC | L1 | L2 | H | T1 | T2 | Lbs | Lbs/Ft | | |
| 06B | 3/8 | 0.225 | 0.250 | 0.129 | 0.500 | 0.528 | 0.250 | 0.278 | 0.323 | 0.039 | 0.049 | 2000 | 0.289 | Sp CL |
| 08B | 1/2 | 0.305 | 0.335 | 0.175 | 0.658 | 0.705 | 0.329 | 0.376 | 0.457 | 0.060 | | 4040 | 0.409 | Sp CL |
| 10B | 5/8 | 0.380 | 0.400 | 0.200 | 0.748 | 0.811 | 0.374 | 0.437 | 0.571 | 0.065 | | 5040 | 0.600 | Sp CL |
| 12B | 3/4 | 0.460 | 0.475 | 0.225 | 0.878 | 0.933 | 0.439 | 0.494 | 0.626 | 0.070 | | 6550 | 0.769 | Sp CL |
| 16B | 1 | 0.670 | 0.625 | 0.325 | 1.382 | 1.496 | 0.691 | 0.805 | 0.792 | 0.122 | 0.154 | 15550 | 1.743 | C |
| 20B | 1 1/4 | 0.770 | 0.750 | 0.400 | 1.582 | 1.744 | 0.791 | 0.953 | 1.024 | 0.138 | 0.178 | 22200 | 2.528 | C |
| 24B | 1 1/2 | 1.000 | 1.000 | 0.576 | 2.100 | 2.303 | 1.050 | 1.253 | 1.315 | 0.193 | 0.233 | 37750 | 4.900 | C |
| 28B | 1 3/4 | 1.220 | 1.100 | 0.625 | 2.563 | 2.807 | 1.282 | 1.525 | 1.440 | 0.250 | 0.291 | 46650 | 6.222 | C |
| 32B | 2 | 1.220 | 1.150 | 0.701 | 2.567 | 2.835 | 1.284 | 1.550 | 1.642 | 0.250 | 0.272 | 53350 | 6.667 | C |
| 40B | 2 1/2 | 1.500 | 1.550 | 0.901 | 3.178 | 3.504 | 1.589 | 1.915 | 2.083 | 0.312 | 0.335 | 80000 | 11.600 | C |

SUPPLY SERVICES LTD 
Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM ANSI SERIES ROLLER CHAIN ATTACHMENT

BENT LUG ATTACHMENTS

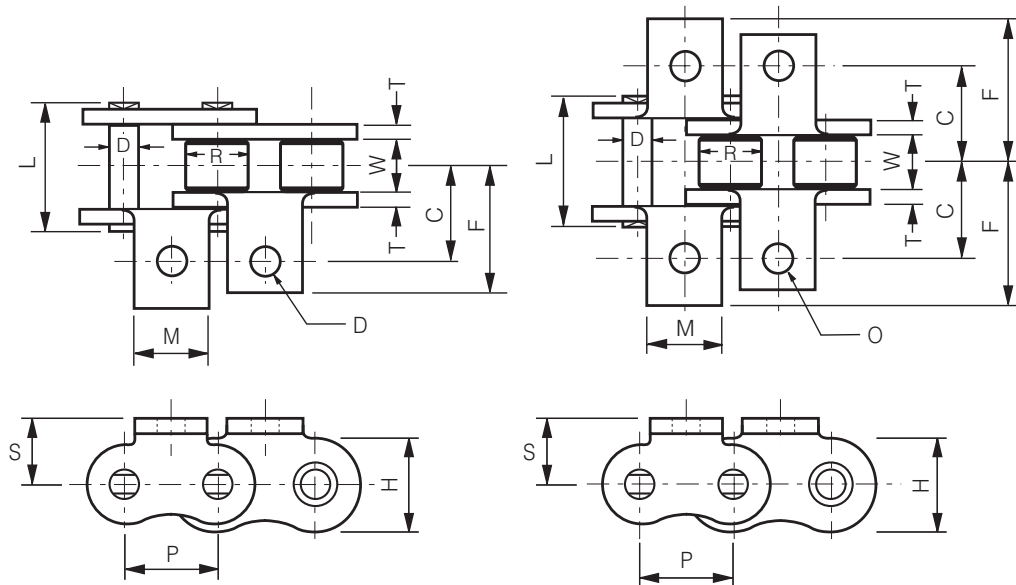

A-1 (BENT LUG 1 SIDE -1 HOLE)

K-1 (BENT LUG 2 SIDES -1 HOLE)


A-1 & K-1 ATTACHMENT DIMENSIONS

| Chain Number | Dimensions – Inches | | | | A-1 | | K-1 | | A-1 | K-1 |
|--------------|---------------------|-----------|----------------------|------------------|-----------------|-------------------|---------------|---------------------|---------------------|-------|
| | Tab Width | Hole Dia. | Attach. Plate Height | C/L to Att. Hole | C/L to Att. End | Across Att. Holes | Overall Width | Additional Wgt/Att. | Additional Wgt/Att. | |
| | M | O | S | C | F | 2C | 2F | Lbs/pc | Lbs/pc | |
| 35 | - | 5/16 | 0.109 | 0.250 | 0.375 | 0.562 | 0.750 | 1.124 | 0.002 | 0.004 |
| 40 | - | 3/8 | 0.140 | 0.312 | 0.500 | 0.679 | 1.000 | 1.358 | 0.003 | 0.006 |
| 50 | - | 1/2 | 0.205 | 0.406 | 0.625 | 0.917 | 1.250 | 1.834 | 0.009 | 0.018 |
| 60 | - | 5/8 | 0.205 | 0.468 | 0.750 | 1.106 | 1.500 | 2.212 | 0.014 | 0.028 |
| 80 | - | 3/4 | 0.265 | 0.625 | 1.000 | 1.413 | 2.000 | 2.826 | 0.030 | 0.060 |
| 100 | - | 1 | 0.343 | 0.781 | 1.250 | 1.742 | 2.500 | 3.484 | 0.059 | 0.118 |
| 120 | - | 1 1/8 | 0.406 | 0.906 | 1.500 | 2.154 | 3.000 | 4.308 | 0.105 | 0.210 |
| 140 | - | 1 3/8 | 0.469 | 1.125 | 1.750 | 2.485 | 3.500 | 4.970 | 0.157 | 0.314 |
| 160 | - | 1 1/2 | 0.547 | 1.250 | 2.000 | 2.828 | 4.000 | 5.656 | 0.214 | 0.428 |

SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM ANSI SERIES ROLLER CHAIN ATTACHMENT

STRAIGHT LUG ATTACHMENTS

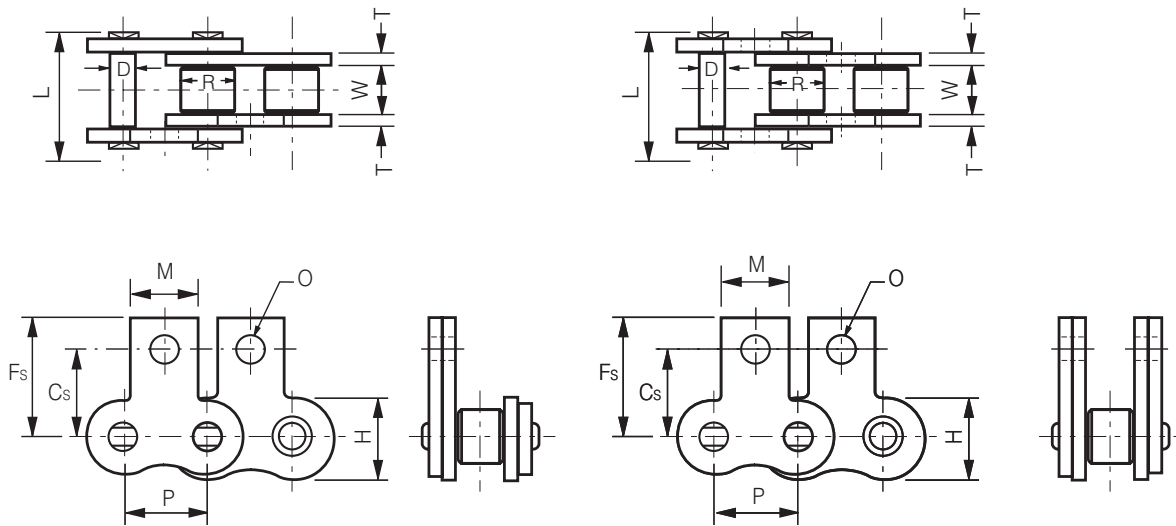

SA-1 (STRAIGHT LUG 1 SIDE - 1 HOLE)

SK-1 (STRAIGHT LUG 2 SIDE - 1 HOLE)

SA-1 & SK-1 ATTACHMENT DIMENSIONS

| Dimensions | Inches | SA-1 & SK-1 | | SA-1 | SK-1 | | | | Additional Wgt/Att. Lbs/pc | Additional Wgt/Att. Lbs/pc |
|------------|--------|-------------|-----------|------|------------------|-----------------|---|---|----------------------------|----------------------------|
| | | Tab Width | Hole Dia. | | C/L to Att. Hole | C/L to Att. Top | | | | |
| | | M | O | | Cs | Fs | | | | |
| 35 | - | 5/16 | 0.109 | - | 0.375 | 0.578 | - | - | 0.002 | 0.004 |
| 40 | - | 3/8 | 0.141 | - | 0.500 | 0.734 | - | - | 0.003 | 0.006 |
| 50 | - | 1/2 | 0.203 | - | 0.625 | 0.906 | - | - | 0.009 | 0.018 |
| 60 | - | 5/8 | 0.203 | - | 0.719 | 1.062 | - | - | 0.014 | 0.028 |
| 80 | - | 3/4 | 0.265 | - | 0.969 | 1.359 | - | - | 0.030 | 0.060 |
| 100 | - | 1 | 0.343 | - | 1.250 | 1.700 | - | - | 0.059 | 0.118 |
| 120 | - | 1 1/8 | 0.406 | - | 1.437 | 2.031 | - | - | 0.105 | 0.210 |
| 140 | - | 1 3/8 | 0.469 | - | 1.750 | 2.484 | - | - | 0.157 | 0.314 |
| 160 | - | 1 1/2 | 0.547 | - | 2.000 | 2.734 | - | - | 0.214 | 0.428 |



SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM LEAF CHAINS

Leaf chains are well-suited for any application requiring flexible, high-strength linkage for reciprocating motion or lifting at relatively low speed. For their low cost and long life, these chains are widely used for lift trucks, masts and other lifting as well as construction, mining machines and balance or counterweights of machine tools.

Construction and Lacing Combinations

Built of interlaced plates held together by riveted pins. The chain nomenclature indicates the lacing combinations.

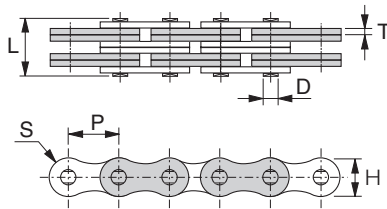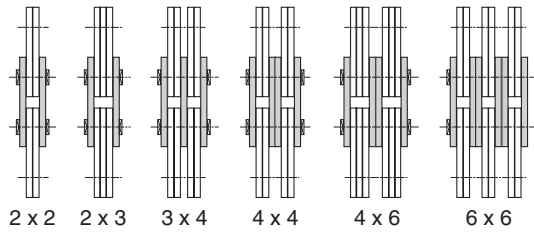

AL Series (Light Duty)

Consisting of link plates of the same contour and thickness as the pin link plates of ANSI roller chains in the same pitch. Mainly used for relatively constant, low, medium load with less shock.

BL Series (Heavy Duty)

Consisting of link plates with the thickness of the next larger size of ANSI roller chain. Chiefly used for medium load with greater shock.


| Chain Number | Lacing | Dimensions – Inches | | | | | | Average Ultimate Strength Lbs | Average Weight Lbs/Ft. |
|--------------|--------|---------------------|-----------|-------------|-------------|----------------|--------------------------|----------------------------------|---------------------------|
| | | Pitch P | Pin | | Plate | | Hole Dia. (min.) S | | |
| | | | Dia. D | Length L | Height H | Thickness T | | | |
| AL 422 | 2 x 2 | 1/2 | 0.156 | 0.331 | 0.406 | 0.060 | 0.1598 | 4000 | 0.24 |
| AL 444 | 4 x 4 | | | 0.587 | | | | 8000 | 0.47 |
| AL 466 | 6 x 6 | | | 0.831 | | | | 12000 | 0.70 |
| AL 522 | 2 x 2 | 5/8 | 0.200 | 0.425 | 0.500 | 0.080 | 0.2019 | 6600 | 0.39 |
| AL 544 | 4 x 4 | | | 0.760 | | | | 13200 | 0.78 |
| AL 566 | 6 x 6 | | | 1.102 | | | | 19800 | 1.16 |
| AL 622 | 2 x 2 | 3/4 | 0.234 | 0.550 | 0.598 | 0.094 | 0.2374 | 9360 | 0.54 |
| AL 644 | 4 x 4 | | | 0.894 | | | | 18720 | 1.13 |
| AL 666 | 6 x 6 | | | 1.295 | | | | 28080 | 1.65 |
| AL 822 | 2 x 2 | 1 | 0.312 | 0.665 | 0.795 | 0.125 | 0.3149 | 16000 | 0.95 |
| AL 844 | 4 x 4 | | | 1.169 | | | | 32000 | 1.94 |
| AL 866 | 6 x 6 | | | 1.705 | | | | 48000 | 2.84 |
| AL 1022 | 2 x 2 | 1 1/4 | 0.375 | 0.783 | 0.965 | 0.156 | 0.3775 | 24200 | 1.65 |
| AL 1044 | 4 x 4 | | | 1.437 | | | | 48400 | 3.23 |
| AL 1066 | 6 x 6 | | | 2.118 | | | | 72600 | 4.86 |
| AL 1222 | 2 x 2 | 1 1/2 | 0.437 | 0.965 | 1.150 | 0.187 | 0.4417 | 32000 | 2.25 |
| AL 1244 | 4 x 4 | | | 1.732 | | | | 64000 | 4.42 |
| AL 1266 | 6 x 6 | | | 2.508 | | | | 96000 | 6.60 |
| AL 1422 | 2 x 2 | 1 3/4 | 0.500 | 1.114 | 1.346 | 0.219 | 0.5047 | 46000 | 3.35 |
| AL 1444 | 4 x 4 | | | 2.028 | | | | 92000 | 6.42 |
| AL 1466 | 6 x 6 | | | 2.909 | | | | 138000 | 9.49 |
| AL 1622 | 2 x 2 | 2 | 0.562 | 1.263 | 1.587 | 0.250 | 0.5669 | 60600 | 4.27 |
| AL 1644 | 4 x 4 | | | 2.311 | | | | 121200 | 8.48 |
| AL 1666 | 6 x 6 | | | 3.350 | | | | 181800 | 12.68 |

| Chain Number | Lacing | Dimensions – Inches | | | | | | Average Ultimate Strength Lbs | Average Weight Lbs/Ft. |
|--------------|--------|---------------------|-----------|-------------|-------------|----------------|--------------------------|----------------------------------|---------------------------|
| | | Pitch P | Pin | | Plate | | Hole Dia. (min.) S | | |
| | | | Dia. D | Length L | Height H | Thickness T | | | |
| BL 422 | 2 x 2 | 1/2 | 0.200 | 0.425 | 0.463 | 0.080 | 0.2019 | 6100 | 0.43 |
| BL 423 | 2 x 3 | | | 0.504 | | | | 6100 | 0.53 |
| BL 434 | 3 x 4 | | | 0.673 | | | | 9200 | 0.72 |
| BL 444 | 4 x 4 | | | 0.760 | | | | 12200 | 0.82 |
| BL 446 | 4 x 6 | | | 0.925 | | | | 12200 | 1.06 |
| BL 466 | 6 x 6 | | | 1.102 | | | | 18400 | 1.27 |
| BL 522 | 2 x 2 | 5/8 | 0.234 | 0.500 | 0.577 | 0.094 | 0.2374 | 9000 | 0.68 |
| BL 523 | 2 x 3 | | | 0.602 | | | | 9000 | 0.80 |
| BL 534 | 3 x 4 | | | 0.807 | | | | 13600 | 1.08 |
| BL 544 | 4 x 4 | | | 0.894 | | | | 18000 | 1.21 |
| BL 546 | 4 x 6 | | | 1.106 | | | | 18900 | 1.52 |
| BL 566 | 6 x 6 | | | 1.295 | | | | 27200 | 1.78 |
| BL 622 | 2 x 2 | 3/4 | 0.312 | 0.673 | 0.691 | 0.125 | 0.3153 | 14300 | 1.03 |
| BL 623 | 2 x 3 | | | 0.780 | | | | 14300 | 1.27 |
| BL 634 | 3 x 4 | | | 1.051 | | | | 21450 | 1.80 |
| BL 644 | 4 x 4 | | | 1.169 | | | | 28600 | 2.04 |
| BL 646 | 4 x 6 | | | 1.453 | | | | 28600 | 2.79 |
| BL 666 | 6 x 6 | | | 1.709 | | | | 42900 | 3.08 |
| BL 822 | 2 x 2 | 1 | 0.375 | 0.783 | 0.950 | 0.156 | 0.3779 | 23100 | 1.73 |
| BL 823 | 2 x 3 | | | 0.957 | | | | 23100 | 2.13 |
| BL 834 | 3 x 4 | | | 1.291 | | | | 34800 | 2.94 |
| BL 844 | 4 x 4 | | | 1.445 | | | | 46200 | 3.33 |
| BL 846 | 4 x 6 | | | 1.787 | | | | 46200 | 4.19 |
| BL 866 | 6 x 6 | | | 2.122 | | | | 69600 | 5.00 |
| BL 1022 | 2 x 2 | 1 1/4 | 0.437 | 0.965 | 1.154 | 0.187 | 0.4409 | 34000 | 2.51 |
| BL 1023 | 2 x 3 | | | 1.138 | | | | 34000 | 3.12 |
| BL 1034 | 3 x 4 | | | 1.539 | | | | 51000 | 4.37 |
| BL 1044 | 4 x 4 | | | 1.736 | | | | 68000 | 4.98 |
| BL 1046 | 4 x 6 | | | 2.118 | | | | 68000 | 6.19 |
| BL 1066 | 6 x 6 | | | 2.512 | | | | 102000 | 7.44 |
| BL 1222 | 2 x 2 | 1 1/2 | 0.500 | 1.114 | 1.382 | 0.219 | 0.5047 | 44600 | 3.21 |
| BL 1223 | 2 x 3 | | | 1.362 | | | | 44600 | 4.34 |
| BL 1234 | 3 x 4 | | | 1.807 | | | | 66900 | 6.08 |
| BL 1244 | 4 x 4 | | | 2.012 | | | | 89200 | 6.90 |
| BL 1246 | 4 x 6 | | | 2.480 | | | | 89200 | 7.97 |
| BL 1266 | 6 x 6 | | | 2.913 | | | | 133800 | 9.68 |
| BL 1422 | 2 x 2 | 1 3/4 | 0.562 | 1.267 | 1.610 | 0.250 | 0.5665 | 60600 | 4.87 |
| BL 1423 | 2 x 3 | | | 1.543 | | | | 60600 | 5.98 |
| BL 1434 | 3 x 4 | | | 2.051 | | | | 90900 | 7.80 |
| BL 1444 | 4 x 4 | | | 2.315 | | | | 121200 | 8.65 |
| BL 1446 | 4 x 6 | | | 2.819 | | | | 121200 | 12.00 |
| BL 1466 | 6 x 6 | | | 3.354 | | | | 181800 | 15.01 |
| BL 1622 | 2 x 2 | 2 | 0.687 | 1.425 | 1.839 | 0.281 | 0.6937 | 84300 | 6.57 |
| BL 1623 | 2 x 3 | | | 1.736 | | | | 84300 | 8.12 |
| BL 1634 | 3 x 4 | | | 2.334 | | | | 126450 | 11.32 |
| BL 1644 | 4 x 4 | | | 2.610 | | | | 168600 | 12.67 |
| BL 1646 | 4 x 6 | | | 3.173 | | | | 168600 | 16.09 |
| BL 1666 | 6 x 6 | | | 3.803 | | | | 252900 | 19.18 |
| BL 2022 | 2 x 2 | 2 1/2 | 0.936 | 1.889 | 2.354 | 0.375 | 0.9389 | 124000 | 9.66 |
| BL 2023 | 2 x 3 | | | 2.283 | | | | 124000 | 11.98 |
| BL 2034 | 3 x 4 | | | 3.070 | | | | 186000 | 16.68 |
| BL 2044 | 4 x 4 | | | 3.460 | | | | 248000 | 19.03 |
| BL 2046 | 4 x 6 | | | 4.248 | | | | 248000 | 23.70 |
| BL 2066 | 6 x 6 | | | 5.393 | | | | 372000 | 28.11 |

CAN-AM DOUBLE PITCH ROLLER CHAINS DRIVE SERIES

Double Pitch, light series power transmission roller chains are a series of roller chains which incorporates pins, bushings and rollers similar in dimensions to the ANSI Standard series roller chains, but with side-plates providing a pitch twice as great.

They are lighter in weight and lower in price than the ANSI standard series roller chains, but they have only one-half the number of pin-bushing joints per foot. Consequently, joint articulation is greater on the same diameter sprockets, so they will not provide as long a service life as an ANSI standard series roller chain.

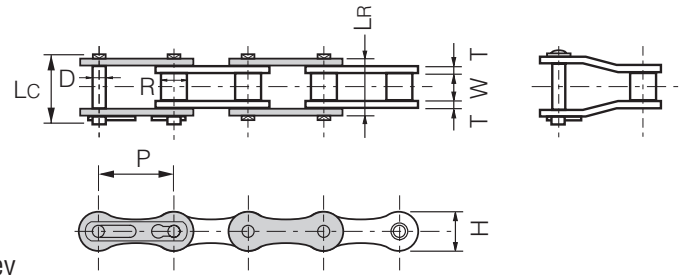

| Chain Number (ANSI) | Dimensions – Inches | | | | | | | | Average Ultimate Strength | Average Weight | Type of Conn. Link |
|---------------------|---------------------|--------|-------|-------|--------|-------|--------|-----------|---------------------------|----------------|--------------------|
| | Pitch | Roller | | Pin | | | Plate | | | | |
| | | Width | Dia. | Dia. | Length | | Height | Thickness | | | |
| P | W | R | D | LR | Lc | H | T | Lbs | Lbs/Ft | | |
| A2040 | 1 | 5/16 | 0.312 | 0.156 | 0.646 | 0.728 | 0.450 | 0.060 | 4300 | 0.32 | C |
| A2050 | 1 1/4 | 3/8 | 0.400 | 0.200 | 0.800 | 0.878 | 0.591 | 0.080 | 7200 | 0.55 | |
| A2060 | 1 1/2 | 1/2 | 0.469 | 0.234 | 1.000 | 1.087 | 0.670 | 0.094 | 9900 | 0.69 | |
| A2080 | 2 | 5/8 | 0.625 | 0.312 | 1.276 | 1.388 | 0.890 | 0.125 | 17600 | 1.15 | |


CONVEYOR SERIES – Standard Roller Type

C-2000 conveyor series chains have rollers of the same diameters and widths as those of ANSI standard roller chains but the pitch of the chains is twice that of the corresponding ANSI standard roller chains.

Side plates are straight-edged and unbeveled. Contours of roller link plates and pin link plates are identical, providing substantial contact areas when chains slide on supporting surfaces.

– Carrier Roller Type

C-2002 conveyor series chains with carrier rollers are the same as the C-2000 series conveyor chains except that the roller diameters are greater so that the rollers project beyond the chain link plates. These chains roll on the flat surfaces with minimum friction.

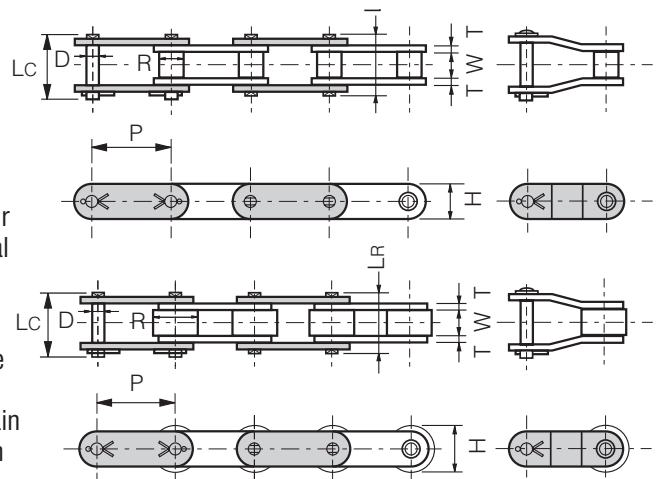

| Chain Number (ANSI) | Dimensions – Inches | | | | | | | | Average Ultimate Strength | Average Weight | Type of Conn. Link |
|---------------------|---------------------|--------|-------|-------|--------|-------|--------|-----------|---------------------------|----------------|--------------------|
| | Pitch | Roller | | Pin | | | Plate | | | | |
| | | Width | Dia. | Dia. | Length | | Height | Thickness | | | |
| P | W | R | D | LR | Lc | H | T | Lbs | Lbs/Ft | | |
| C2040 | 1 | 5/16 | 0.312 | 0.156 | 0.646 | 0.728 | 0.450 | 0.060 | 4300 | 0.32 | C |
| C2042 | | | 0.625 | | | | | | | 0.55 | |
| C2050 | 1 1/4 | 3/8 | 0.400 | 0.200 | 0.800 | 0.878 | 0.591 | 0.080 | 7200 | 0.55 | |
| C2052 | | | 0.750 | | | | | | | 0.85 | |
| C2060H | 1 1/2 | 1/2 | 0.469 | 0.234 | 1.130 | 1.221 | 0.670 | 0.125 | 12300 | 0.93 | |
| C2062H | | | 0.875 | | | | | | | 1.40 | |
| C2080H | 2 | 5/8 | 0.625 | 0.312 | 1.398 | 1.528 | 0.890 | 0.156 | 20200 | 1.56 | |
| C2082H | | | 1.125 | | | | | | | 2.26 | |
| C2100H | 2 1/2 | 3/4 | 0.750 | 0.375 | 1.662 | 1.800 | 1.126 | 0.187 | 30800 | 2.33 | |
| C2102H | | | 1.562 | | | | | | | 3.80 | |
| C2120H | 3 | 1 | 0.875 | 0.437 | 2.072 | 2.244 | 1.374 | 0.219 | 41800 | 3.31 | |
| C2122H | | | 1.750 | | | | | | | 5.30 | |
| C2160H | 4 | 1 1/4 | 1.125 | 0.562 | 2.666 | 2.870 | 1.874 | 0.281 | 68700 | 5.40 | |
| C2162H | | | 2.250 | | | | | | | 8.60 | |

CAN-AM SPECIALTY ROLLER CHAIN PRODUCTS

AQUA-PROOF ROLLER CHAIN *

Excellent corrosion resistance without plating. Same strength and working load values as standard chain. No hydrogen embrittlement by surface treatment. For identification, a suffix "AP" is added to the chain numbers.

SALT SPRAY TEST

| Chains | Hour for Rust developed (hrs) |
|--------------------------------|-------------------------------|
| Nickel plated | 48 |
| Special Surface treated * | 600 ~ 840 |
| Made of SUS304 Stainless Steel | above 840 ~ No rust |


NICKEL-PLATED CHAINS

Ideal for outdoor operations and in situations where machinery and equipment must be run in a lightly corrosive atmosphere or where good chain appearance may be desired.

For identification, a suffix "NP" is added to the chain numbers.

STAINLESS STEEL CHAINS

CAN-AM stainless steel roller chains are recommended for use in such unusual atmospheres as water, acid, alkali, humidity, high or low temperature which corrode the standard roller chains and shorten their life. Their real worth will be proven in the food processing industry where rust, scale, oil, etc, are unacceptable. For identification, a suffix "SS" is added to the chain numbers.

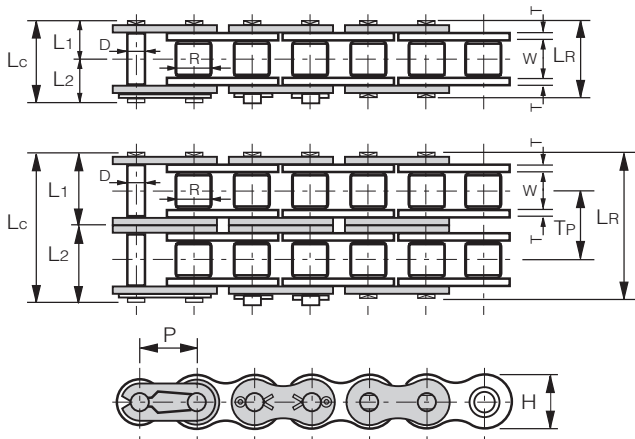

SUPPLY SERVICES LTD
 Phone 0800 102 112 - www.supplyservices.co.nz

| Aqua-Proof Chain Number | Nickel-Plated Chain Number | Stainless Steel Chain Number | Pitch | Dimensions – Inches | | | | | | | | | | Max. Allowable Load Lbs | Average Weight Lbs/Ft |
|-------------------------|----------------------------|------------------------------|-------|---------------------|-------|-------|--------|-------|--------|-----------|-------|----------------|-------|-------------------------|-----------------------|
| | | | | Roller | | Pin | | | | Plate | | Traverse Pitch | | | |
| | | | | Width | Dia. | Dia. | Length | | Height | Thickness | | | | | |
| P | W | R | D | LR | Lc | L1 | L2 | H | T | TP | | | | | |
| - | 35 NP | 35 SS | 3/8 | 3/16 | 0.200 | 0.141 | 0.466 | 0.500 | 0.233 | 0.267 | 0.354 | 0.050 | - | 60 | 0.23 |
| 40 AP | 40 NP | 40 SS | 1/2 | 5/16 | 0.312 | 0.156 | 0.646 | 0.682 | 0.323 | 0.359 | 0.463 | 0.060 | - | 100 | 0.40 |
| 50 AP | 50 NP | 50 SS | 5/8 | 3/8 | 0.400 | 0.200 | 0.800 | 0.863 | 0.400 | 0.463 | 0.577 | 0.080 | - | 160 | 0.66 |
| 60 AP | 60 NP | 60 SS | 3/4 | 1/2 | 0.469 | 0.234 | 1.000 | 1.048 | 0.500 | 0.548 | 0.691 | 0.094 | - | 230 | 0.98 |
| 80 AP | 80 NP | 80 SS | 1 | 5/8 | 0.625 | 0.312 | 1.276 | 1.388 | 0.638 | 0.750 | 0.921 | 0.125 | - | 400 | 1.69 |
| 100 AP | 100 NP | 100 SS | 1 1/4 | 3/4 | 0.750 | 0.375 | 1.544 | 1.685 | 0.772 | 0.913 | 1.154 | 0.156 | - | 580 | 2.63 |
| 120 AP | - | 120 SS | 1 1/2 | 1 | 0.875 | 0.437 | 1.942 | 2.095 | 0.971 | 1.124 | 1.382 | 0.187 | - | 870 | 3.87 |
| 140 AP | - | 140 SS | 1 3/4 | 1 | 1.000 | 0.500 | 2.120 | 2.288 | 1.060 | 1.228 | 1.610 | 0.219 | - | 1040 | 4.98 |
| 160 AP | - | 160 SS | 2 | 1 1/4 | 1.125 | 0.562 | 2.524 | 2.697 | 1.262 | 1.435 | 1.839 | 0.250 | - | 1440 | 6.58 |
| - | 35 NP-2 | - | 3/8 | 3/16 | 0.200 | 0.141 | 0.864 | 0.906 | 0.432 | 0.474 | 0.354 | 0.050 | 0.398 | 4800 | 0.42 |
| - | 40 NP-2 | - | 1/2 | 5/16 | 0.312 | 0.156 | 1.206 | 1.248 | 0.603 | 0.645 | 0.463 | 0.060 | 0.567 | 8600 | 0.82 |
| - | 50 NP-2 | - | 5/8 | 3/8 | 0.400 | 0.200 | 1.504 | 1.583 | 0.752 | 0.831 | 0.577 | 0.080 | 0.712 | 14400 | 1.34 |
| - | 60 NP-2 | - | 3/4 | 1/2 | 0.469 | 0.234 | 1.890 | 1.945 | 0.945 | 1.000 | 0.691 | 0.094 | 0.898 | 19800 | 1.98 |
| - | 80 NP-2 | - | 1 | 5/8 | 0.625 | 0.312 | 2.425 | 2.539 | 1.213 | 1.327 | 0.921 | 0.125 | 1.153 | 35200 | 3.43 |
| - | 100 NP-2 | - | 1 1/4 | 3/4 | 0.750 | 0.375 | 2.950 | 3.102 | 1.475 | 1.627 | 1.154 | 0.156 | 1.409 | 52800 | 5.20 |


Tabular dimensions and weights are approximate and non-binding. Design improvements may result in variations to published figures. Verification is recommended. © 1994 CAN-AM Chains, all rights reserved.

CAN-AM SPECIALTY ROLLER CHAIN PRODUCTS

FLAT TOP (TABLE TOP) CONVEYOR CHAINS

CAN-AM TT-type top chains are made of only two parts – AISI 403 top plates with curled hinged pins – as a standard. This simple construction assures high strength, longer service life and easy washing for sanitation and maintenance. Widely used in food, beverage, packaging, automation, electronic parts and other handling operations. Standard chains will be furnished unless otherwise specified. Chains of AISI 430 and AISI 304 may be supplied upon request.

Maximum working load – 350 lbs.

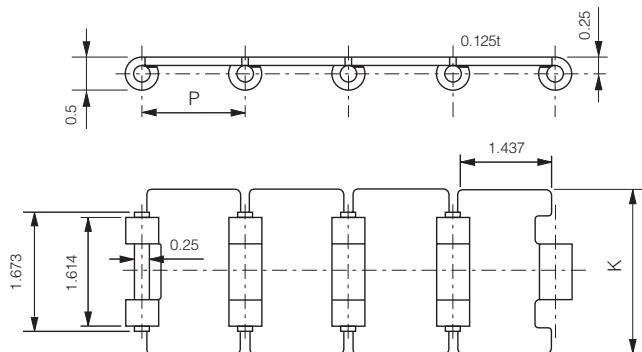


| Chain Number | Dimensions – Inches | | Average Weight Lbs/Ft |
|--------------|---------------------|---------------------|--------------------------|
| | Pitch P | Width of Pitch K | |
| TT-22 | 1.500 | 2.250 | 1.45 |
| TT-24 | | 2.500 | 1.48 |
| TT-30 | | 3.000 | 1.68 |
| TT-32 | | 3.250 | 1.75 |
| TT-34 | | 3.500 | 1.82 |
| TT-36 | | 3.950 | 1.86 |

| Chain Number | Dimensions – Inches | | Average Weight Lbs/Ft |
|--------------|---------------------|---------------------|--------------------------|
| | Pitch P | Width of Pitch K | |
| TT-40 | 1.500 | 4.000 | 1.95 |
| TT-44 | | 4.500 | 2.29 |
| TT-50 | | 5.000 | 2.36 |
| TT-60 | | 6.000 | 2.77 |
| TT-64 | | 6.500 | 2.96 |
| TT-74 | | 7.500 | 3.40 |

TOP PLATE CONVEYOR CHAINS

CAN-AM TP-type top chains consist of top plates (made of ANSI 403 as a standard) and steel roller chains identical to A2060. The top plates are accurately and firmly attached to the link plates of the chain. Standard top chains will be supplied unless otherwise specified. Chains with AISI 430 and AISI 304 parts throughout, as nickel-plated chains, may be furnished if desired on a made-to-order basis.

Maximum working load – 550 lbs.

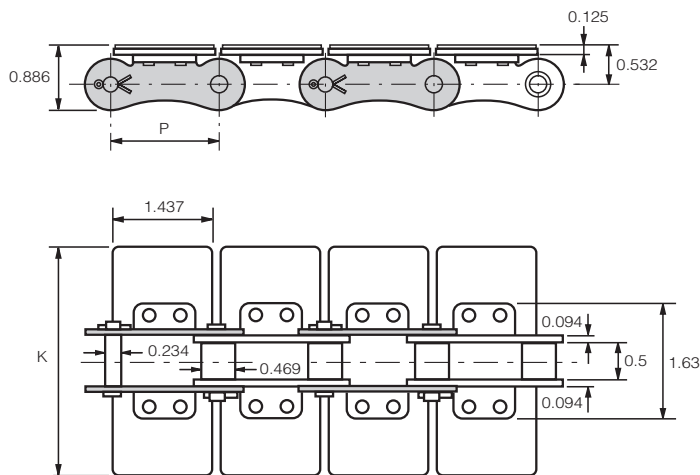

| Chain Number | Dimensions – Inches | | Average Weight Lbs/Ft |
|--------------|---------------------|---------------------|--------------------------|
| | Pitch P | Width of Pitch K | |
| TP-24 | 1.500 | 2.500 | 1.90 |
| TP-26 | | 2.750 | 2.00 |
| TP-30 | | 3.000 | 2.11 |
| TP-32 | | 3.250 | 2.20 |
| TP-34 | | 3.500 | 2.30 |

| Chain Number | Dimensions – Inches | | Average Weight Lbs/Ft |
|--------------|---------------------|---------------------|--------------------------|
| | Pitch P | Width of Pitch K | |
| TP-40 | 1.500 | 4.000 | 2.52 |
| TP-44 | | 4.500 | 2.68 |
| TP-50 | | 5.000 | 2.89 |
| TP-60 | | 6.000 | 3.32 |
| TP-64 | | 6.500 | 3.51 |

CAN-AM SPECIALTY ROLLER CHAIN PRODUCTS

E & S SERIES ROLLER CHAINS

E-Series roller chains have sharply improved fatigue resistance to repeated load by employing superior-grade special steel pins. Sizes are identical to ANSI standard roller chains and interchangeable with them.

S-Series roller chains are designed for high-breaking strength and maximum endurance. Combination of plates one size thicker than standard and thick, tough pins ensures accurate operation and long performance life under harsh, heavy loads. Single strand roller chains of this series run on standard single roller chain sprockets.

HE-SERIES ROLLER CHAINS

HE-Series roller chains have greater shock resistance, fatigue strength and breaking strength than the H-Series. Plates one size thicker than standard roller chains and highest-class pins employed prove their worth in operation at low and medium speeds. Single strand roller chains of this series operate on standard single roller chain sprockets.

SUPER-SERIES ROLLER CHAINS

Super-Series roller chains are developed to offer you longer service life, thus leading to labor savings. Thorough consideration of fitting portions and plate configurations and the use of high-grade special alloy steel components ensure the chain's greater resistance to fatigue and shock. Operative on standard roller chain sprockets. Super-heavy-duty series – roller chains provided with link plates of next larger chain sizes and offers you higher performance and superior quality.

OIL-FIELD CHAINS


Oil-field chains are manufactured in accordance with ANSI, API standards and officially approved by The American Petroleum Institute for high quality, reliability and long trouble-free service life. Used in oilfield drilling and producing operations such as hoisting, pumping and drawworks.

SELF-LUBE CHAINS


Self-Lube roller chains being self-lubricating assure seizure-free, and long-wear life where normal lubrication is not possible, undesirable, or restricted on such machines as food processing, textile, packing and printing/binding. Interchangeable with ANSI roller chains and workable on standard ANSI sprockets. For identification, a suffix "SL" is added to the chain numbers.

SIDE BOW CHAINS

Side Bow chains are provided with "extra clearance" between pins, bushings and link plates to permit freedom of operation around a curve or in a twist. The basic dimensions, quality and finish are the same as those of ANSI standard roller chains. Widely used for live-roll conveyors and with attachments or cross-slats to convey products or materials around curves. For identification, a suffix "SB" is added to the chain numbers.



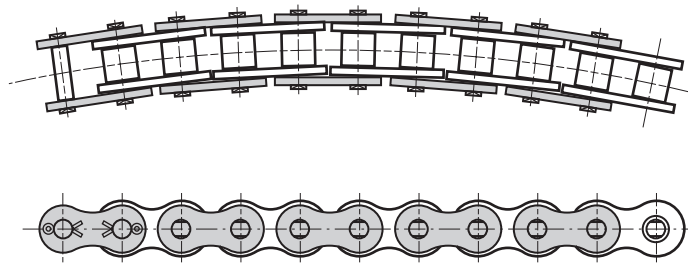


SUPPLY SERVICES LTD 
Phone 0800 102 112 - www.supplyservices.co.nz

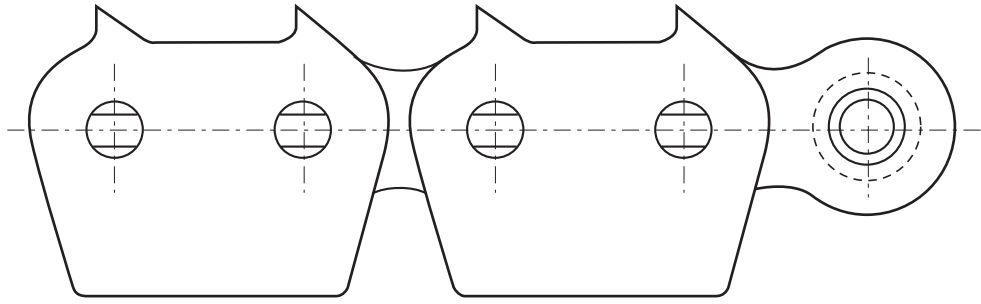



CAN-AM

Sharp Top Roller Chains

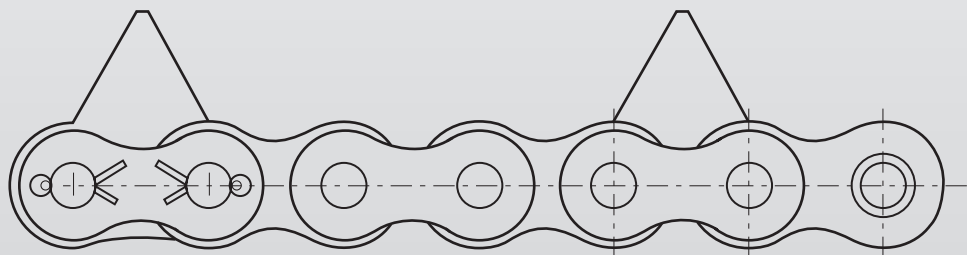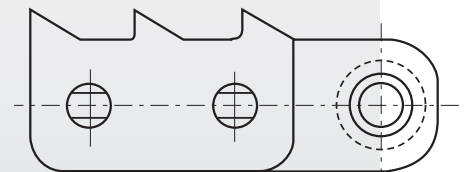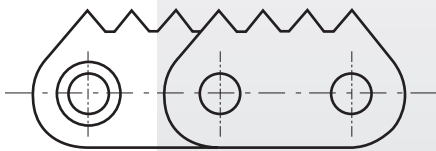

CAN-AM SHARP TOP CHAINS

3-POINT (ST) SERIES – SINGLE STRAND

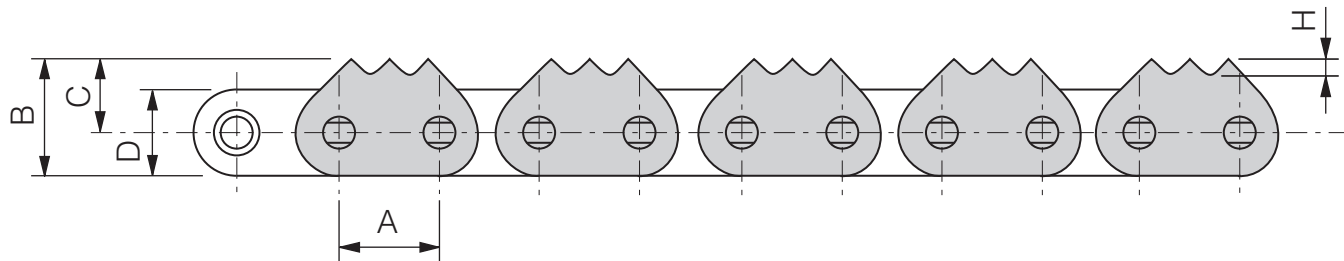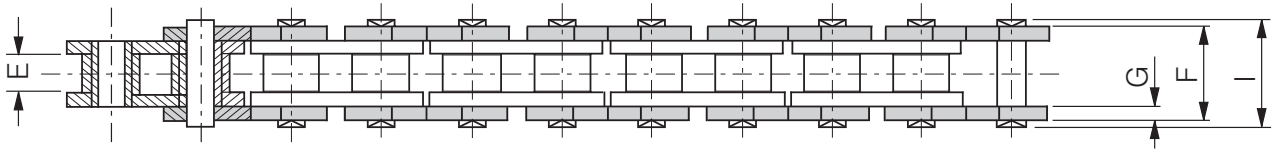


SINGLE STRAND

| Chain Number | A | B | C | D | E | F | G | H | I |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 60-1 ST | 0.750 | 0.850 | 0.512 | 0.689 | 0.500 | 0.878 | 0.094 | 0.094 | 1.000 |
| 80-1 ST | 1.000 | 1.140 | 0.685 | 0.914 | 0.622 | 1.130 | 0.125 | 0.125 | 1.275 |
| 100-1 ST | 1.250 | 1.325 | 0.750 | 1.142 | 0.711 | 1.374 | 0.156 | 0.125 | 1.544 |
| 120-1 ST | 1.500 | 1.594 | 0.909 | 1.370 | 1.000 | 1.750 | 0.187 | 0.125 | 1.942 |

SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM SHARP TOP CHAINS

3-POINT (ST) SERIES – DUPLEX

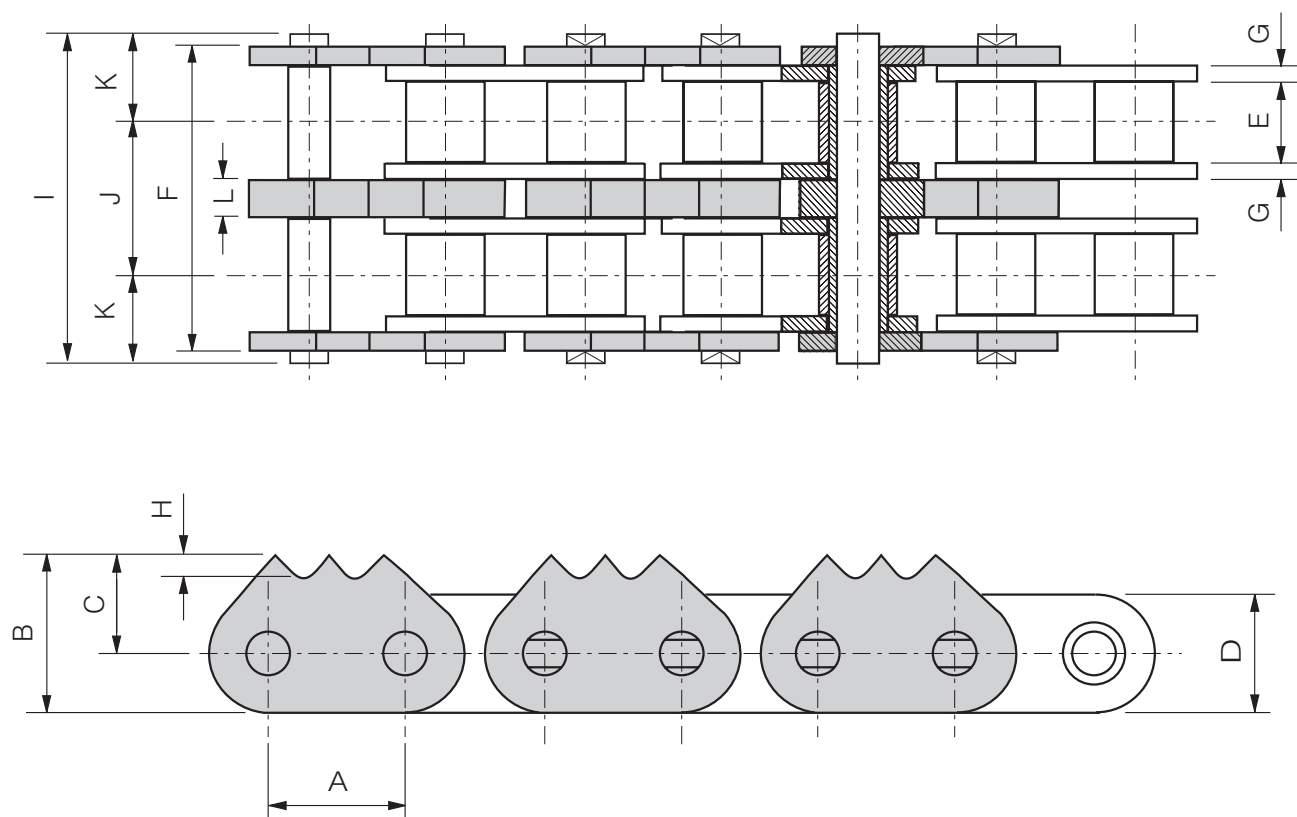


DUPLEX

| Chain Number | A | B | C | D | E | F | G | H | I | J | K | L |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 60-2 ST | 0.750 | 0.854 | 0.510 | 0.685 | 0.500 | 1.774 | 0.094 | 0.094 | 1.900 | 0.898 | 0.500 | – |
| 80-2 ST | 1.000 | 1.140 | 0.685 | 0.914 | 0.625 | 2.310 | 0.125 | 0.125 | 2.420 | 1.153 | 0.630 | 0.249 |
| 100-2 ST | 1.250 | 1.325 | 0.715 | 1.147 | 0.750 | 2.805 | 0.156 | 0.125 | 2.953 | 1.409 | 0.772 | 0.310 |
| 120-2 ST | 1.500 | 1.594 | 0.909 | 1.370 | 1.000 | 3.300 | 0.187 | 0.125 | 3.729 | 1.787 | 0.970 | 0.410 |

SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM SHARP TOP CHAINS

3-POINT (ST) SERIES – TRIPLEX

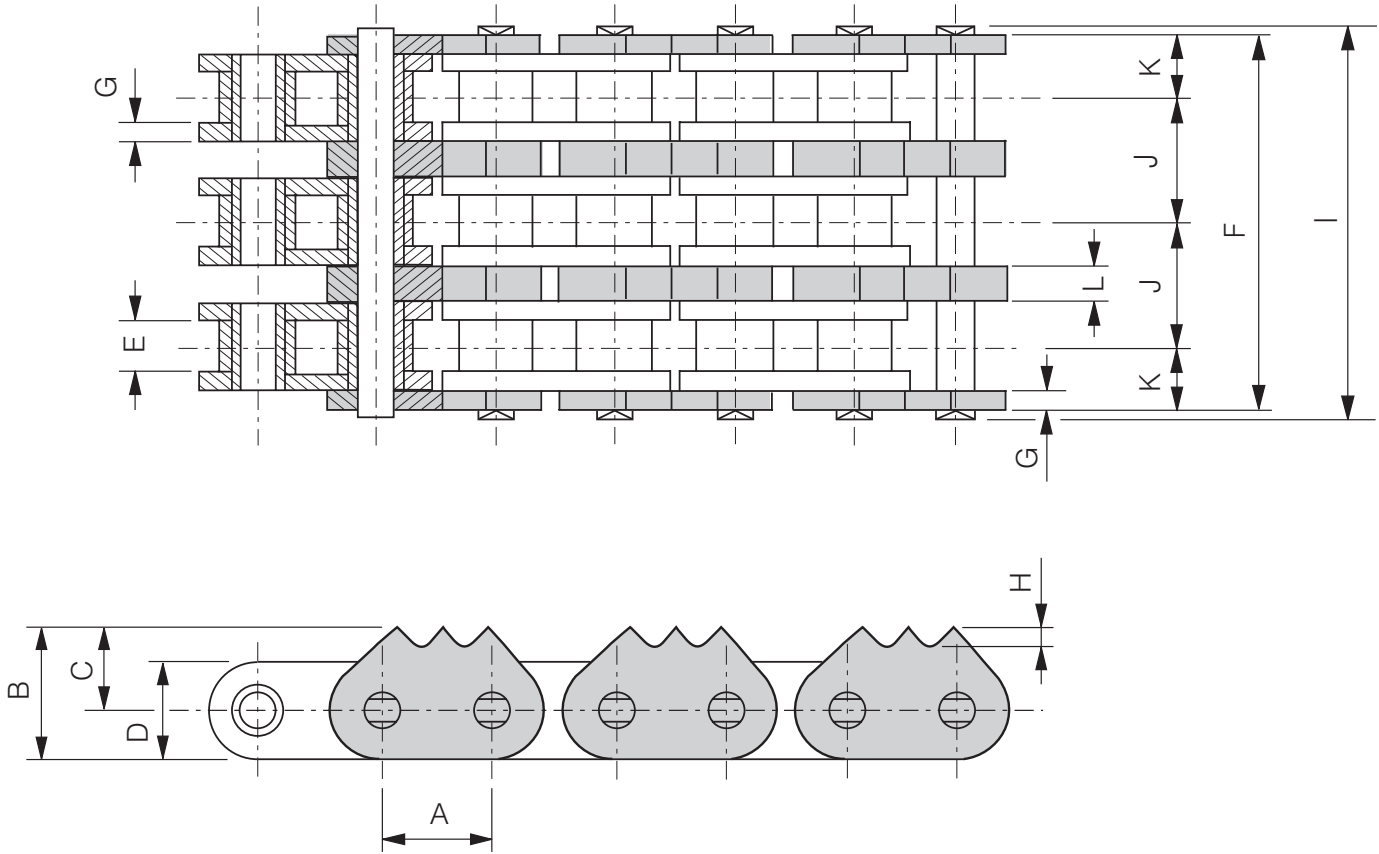


TRIPLEX

| Chain Number | A | B | C | D | E | F | G | H | I | J | K | L |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 80-3 ST | 1.000 | 1.140 | 0.685 | 0.914 | 0.625 | 3.460 | 0.125 | 0.126 | 3.580 | 1.153 | 0.650 | 0.250 |
| 100-3 ST | 1.250 | 1.325 | 0.754 | 1.147 | 0.750 | 4.200 | 0.156 | 0.126 | 4.362 | 1.409 | 0.772 | 0.310 |

SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz

CAN-AM SHARP TOP CHAINS

3-POINT (ST) SERIES – QUAD

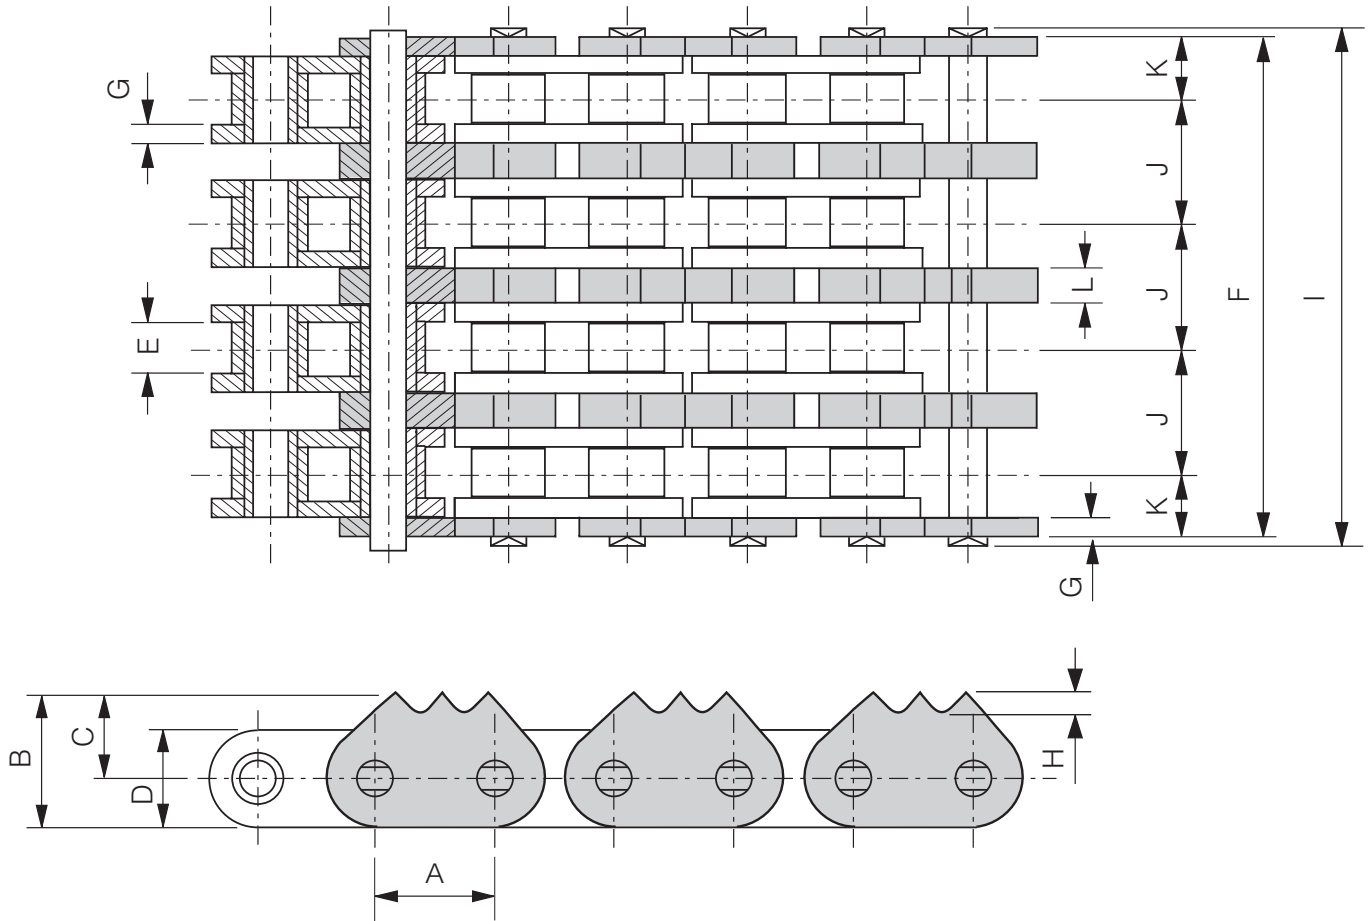

QUAD


| Chain Number | A | B | C | D | E | F | G | H | I | J | K | L |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 80-4 ST | 1.000 | 1.140 | 0.685 | 0.914 | 0.625 | 4.614 | 0.125 | 0.126 | 4.740 | 1.153 | 0.645 | 0.250 |
| 120-4 ST | 1.500 | 1.594 | 0.909 | 1.370 | 1.000 | 7.150 | 0.187 | 0.125 | 7.303 | 1.787 | 0.970 | 0.410 |

SUPPLY SERVICES LTD 
 Phone 0800 102 112 - www.supplyservices.co.nz


CAN-AM SHARP TOP CHAINS

2-POINT 80 (SLL) SERIES


"SLASHER LOW PROFILE"

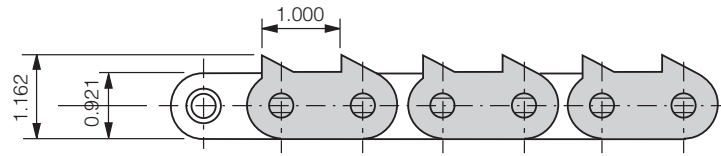


80-1 SLL

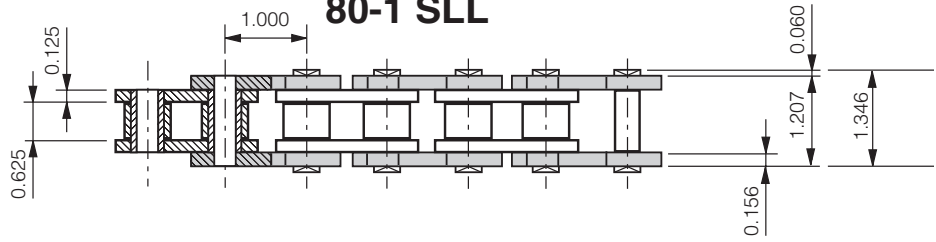


80-2 SLL

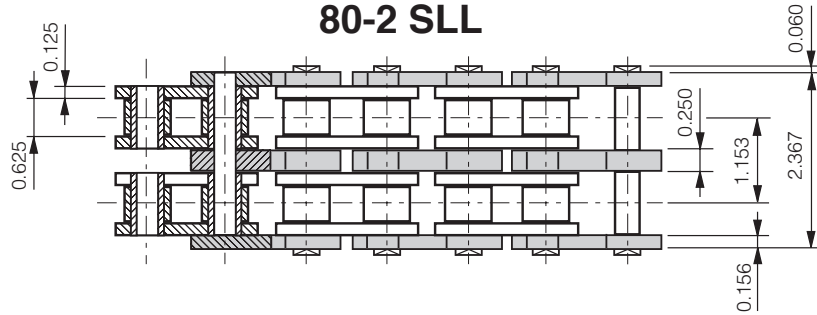

80-3 SLL

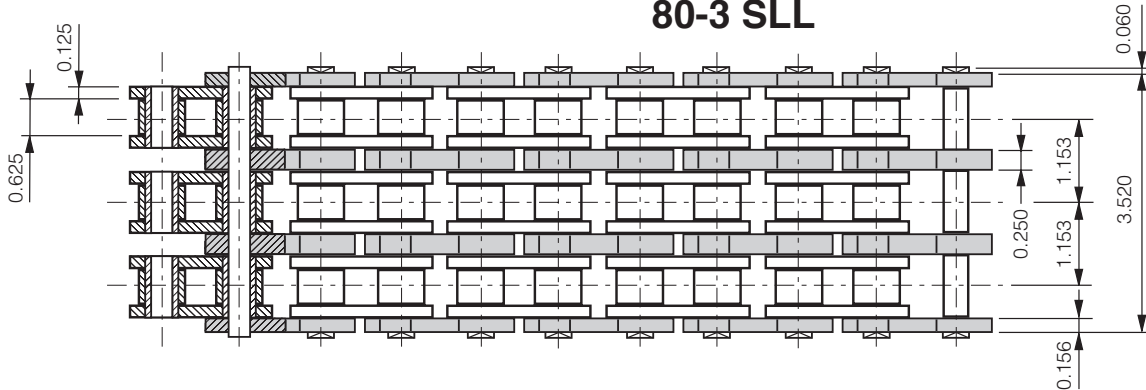


80-4 SLL

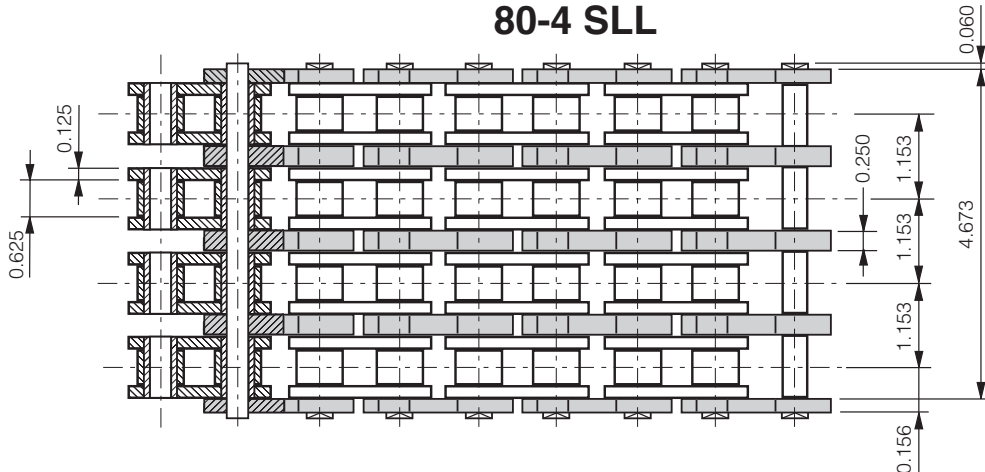

CAN-AM SHARP TOP CHAINS

100 (SLL) SERIES

"SLASHER LOW PROFILE"

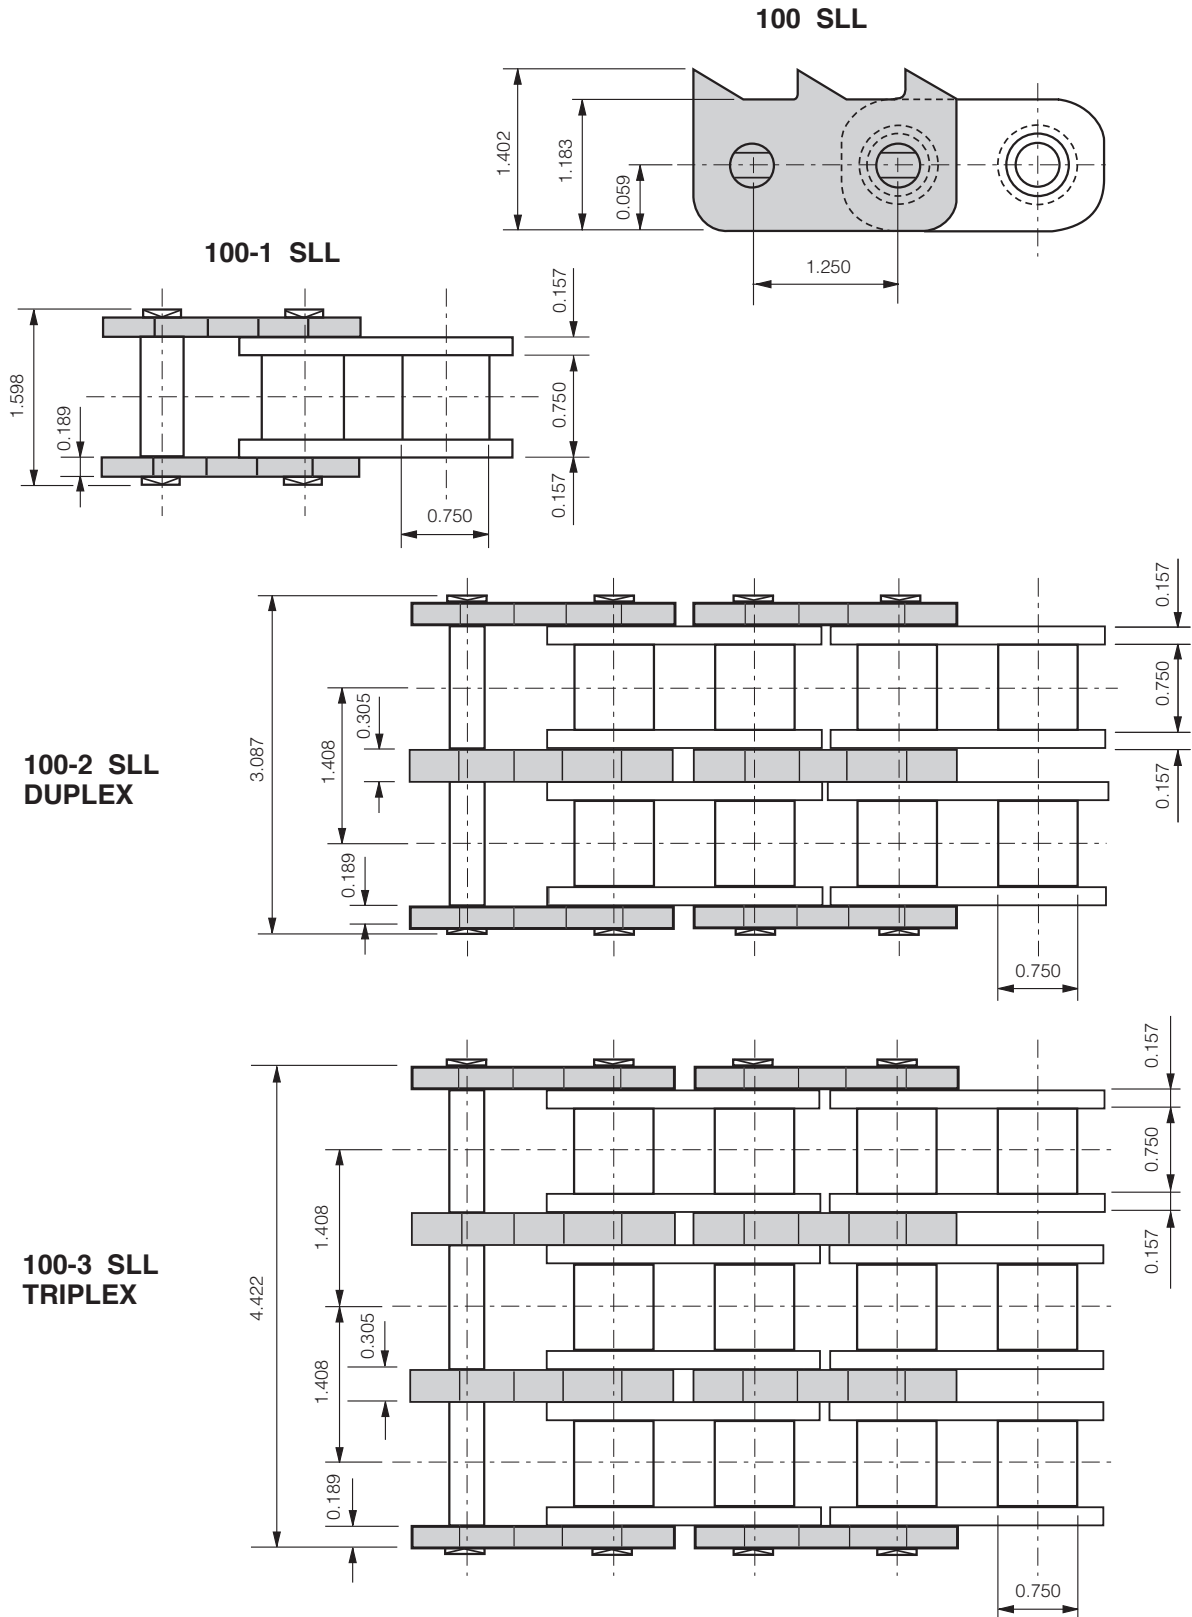


CAN-AM SHARP TOP CHAINS


80 (5 PEP) SERIES

(5 POINT EVERY PITCH)


80 (5 PEP) SERIES

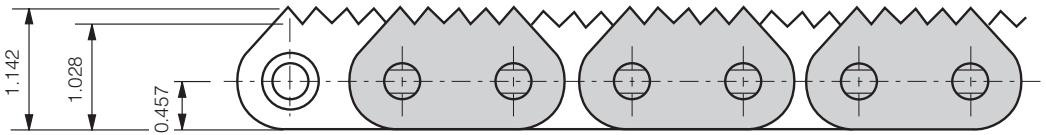


80-2 (5 PEP) DUPLEX

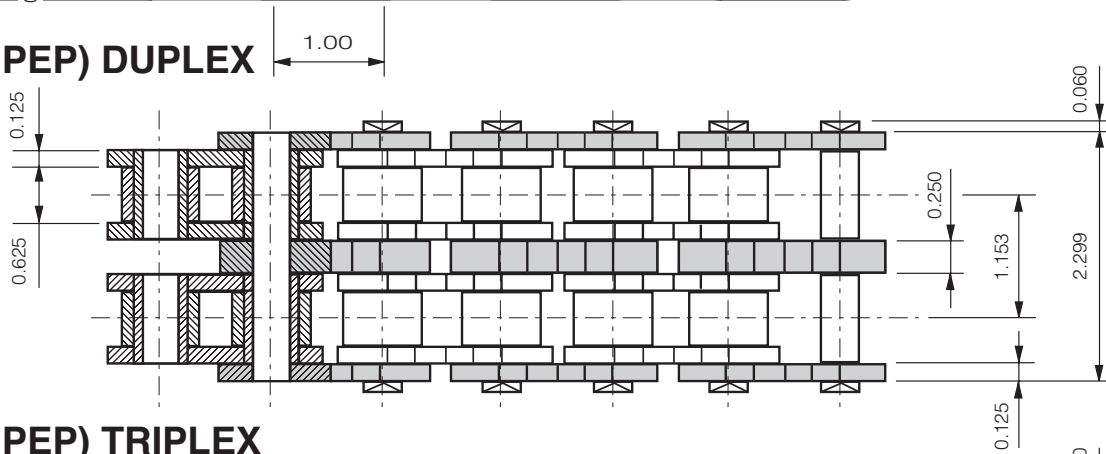

80-3 (5 PEP) TRIPLEX

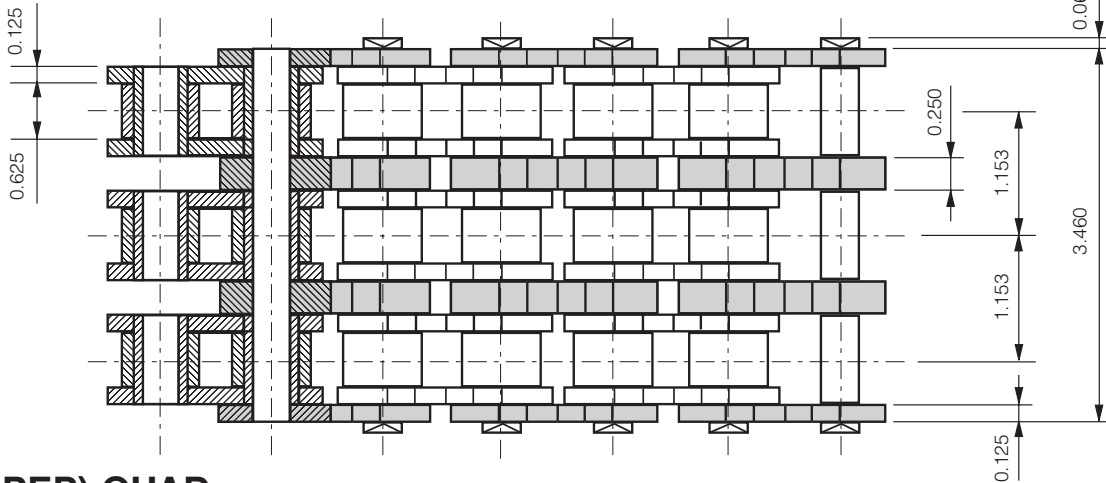

80-4 (5 PEP) QUAD




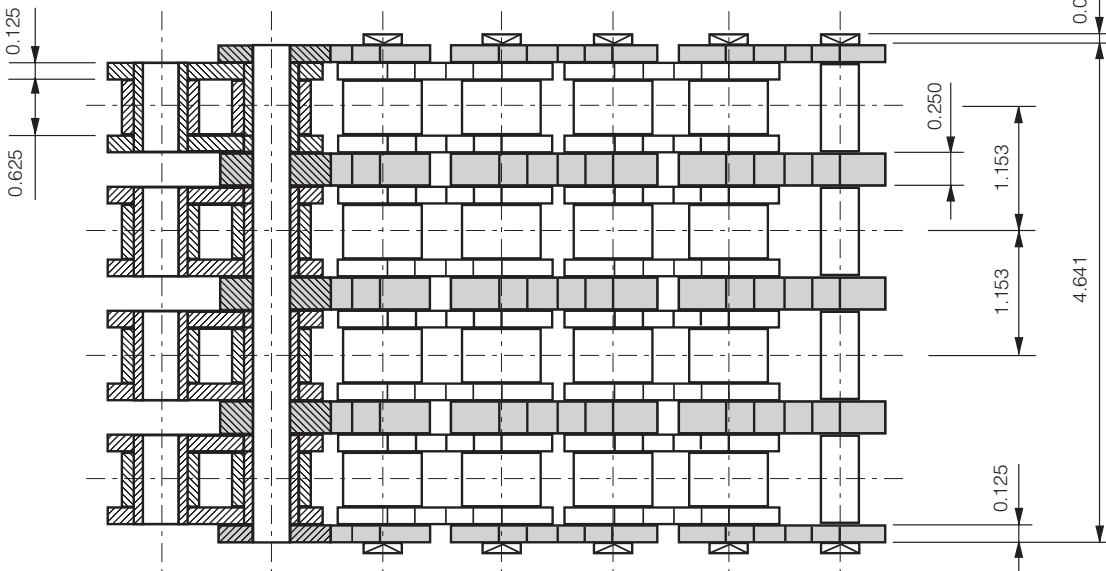


CAN-AM SHARP TOP CHAINS

80-3 (W2P/W4P) SERIES

WAFFERIZER CHAIN


80-3 W2P/W4P SHARP TOP CHAIN

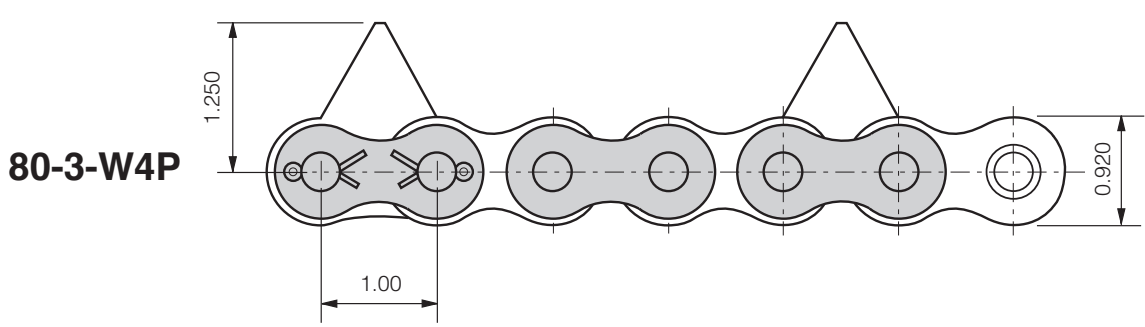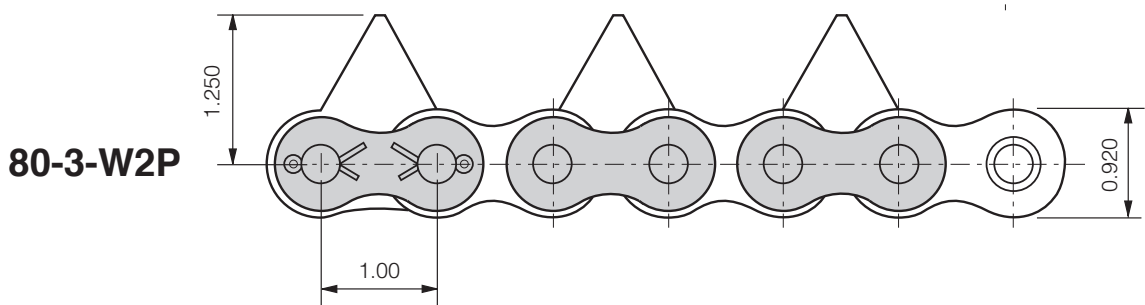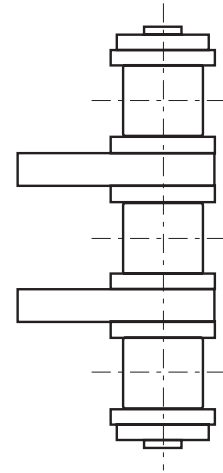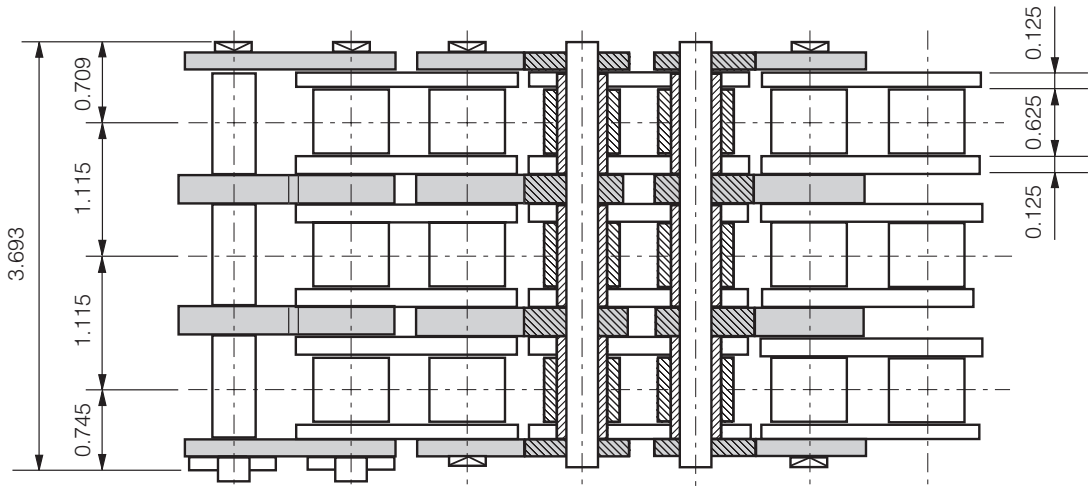


CAN-AM SHARP TOP CHAINS

160-1-DP SERIES


160-1-DP

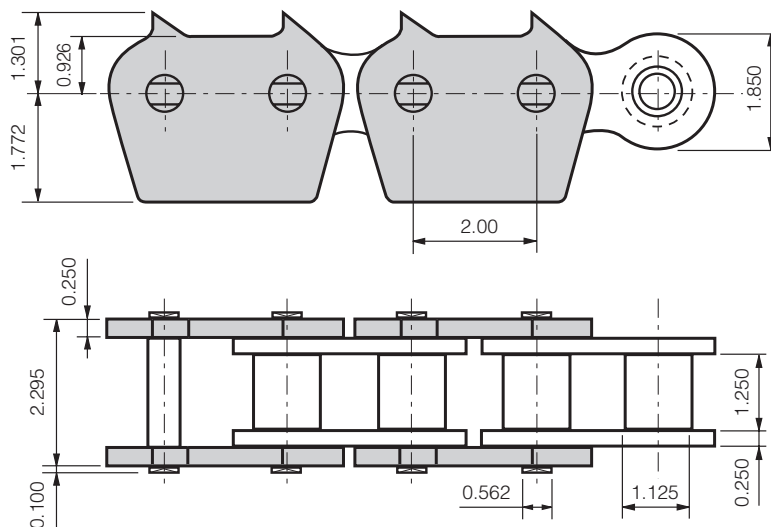

32B SERIES
Narrow Series

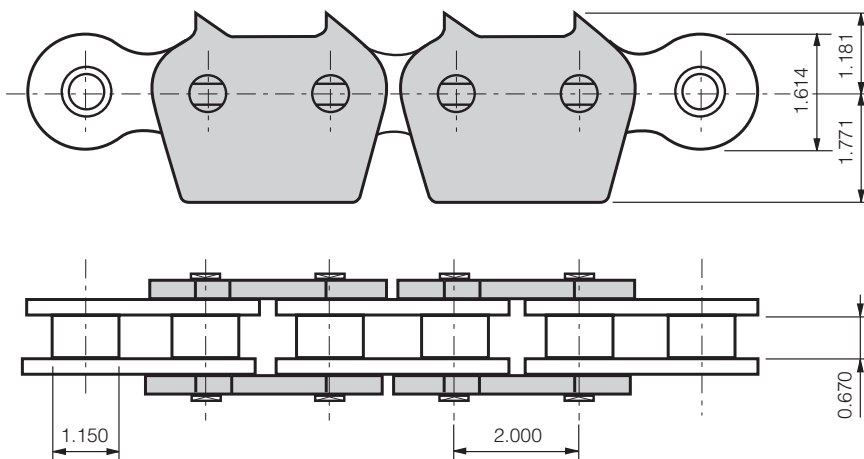


32B SERIES
Standard Series

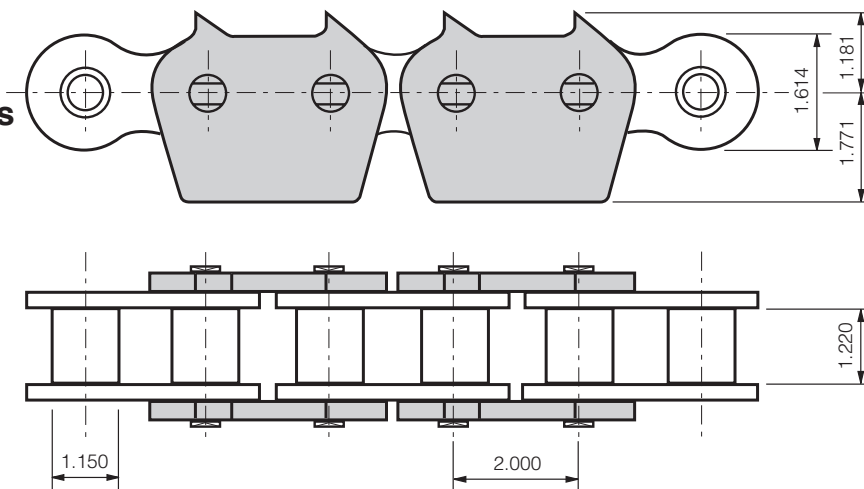

CAN-AM SHARP TOP CHAINS

NEW PRODUCTS

(4 POINT EVERY PITCH) 80-2-4PEP SHARP TOP CHAIN

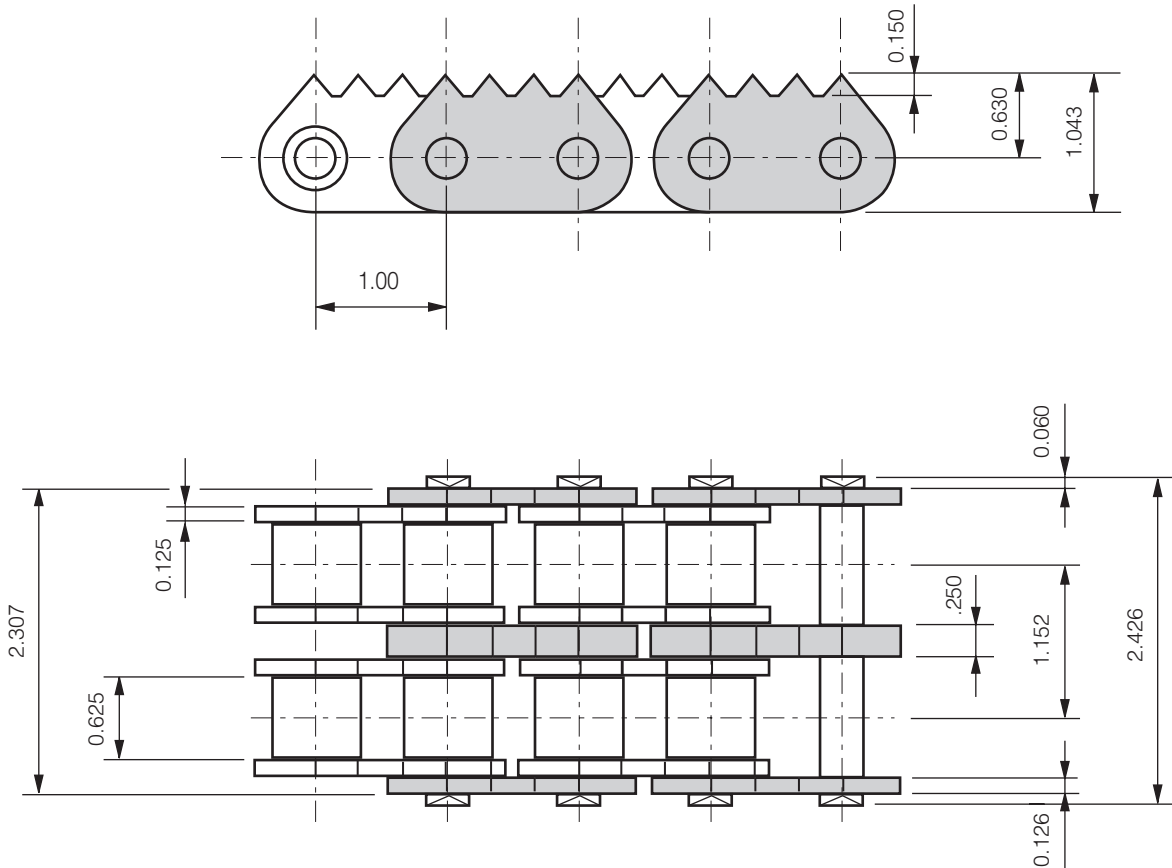

INDUCTION HARDENED SERIES

Tooth hardness of Rc 58-60. IH-Series of Sharp Top Chain is available in selected variations of 80-ST and 80-5PEP products.






80-2-ST-IH

80-3-ST-IH

80-2-5PEP-IH

80-3-5PEP-IH

SUPPLY SERVICES LTD 
Phone 0800 102 112 - www.supplyservices.co.nz

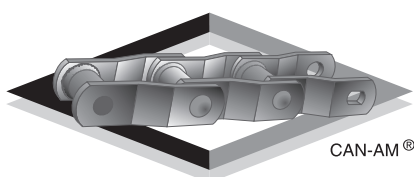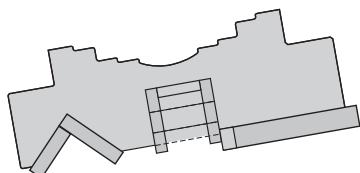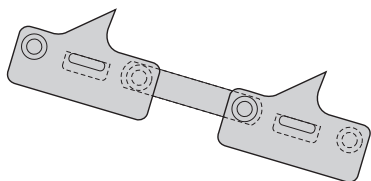

CAN-AM®

PRODUCTS AND SERVICES PROVIDED BY CAN-AM CHAINS

SHARP CHAINS D.L.I. CHAINS AUTO ROTATE CHAINS

CAN-AM Chains make a full range of specialty chain and flights to suit all facets of industry. Pictured here are two examples of high speed scanner/canter feed chains for the lumber industry.

CAN-AM FABRICATED STEEL SPROCKETS

Normally made of mild steel plate. Heat treated and induction hardened plate sprockets with hardnesses from 360 to 500 BHN are available.

MILL & DRAG CHAIN

CAN-AM's flag ship. We manufacture mill and drag chain for the world.

SPLIT SLEEVE BEARINGS 2-2500 SERIES



CAN-AM manufactures a full line of these bearings and stocks them with liners of polyurethane, bronze, babbitt or Zinc Aluminum.

Please contact us for further information or visit our web site at www.can-amchains.com

SUPPLY SERVICES LTD



Phone 0800 102 112 - www.supplyservices.co.nz

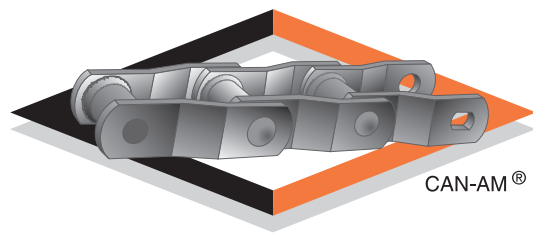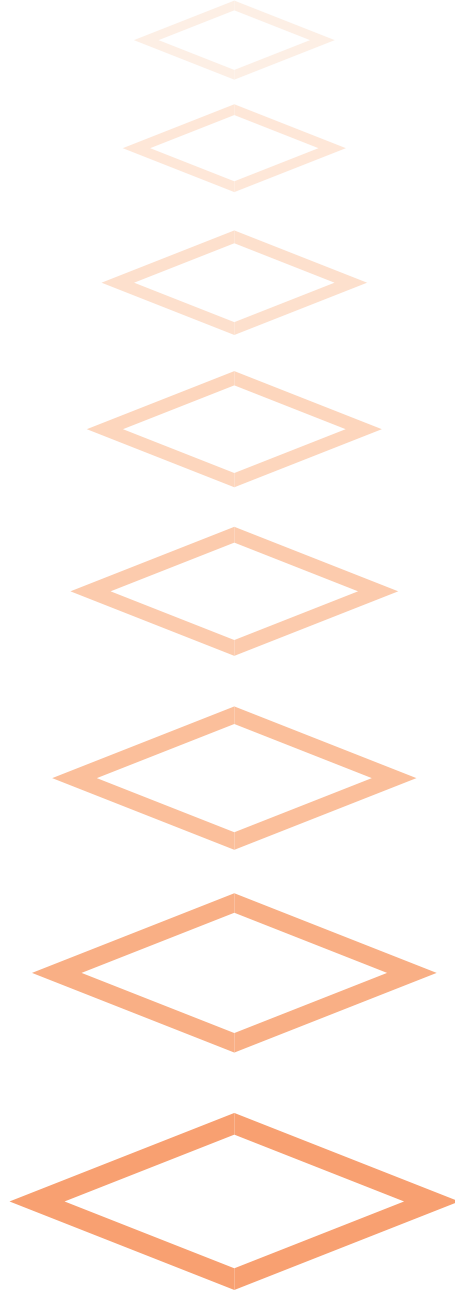

CAN-AM

Challenge Us Today!

SUPPLY SERVICES LTD 

Phone 0800 102 112 - www.supplyservices.co.nz