


SUPPLY SERVICES

performance engineering products

CAN-AM HEAVY-SERIES ROLLER CHAINS

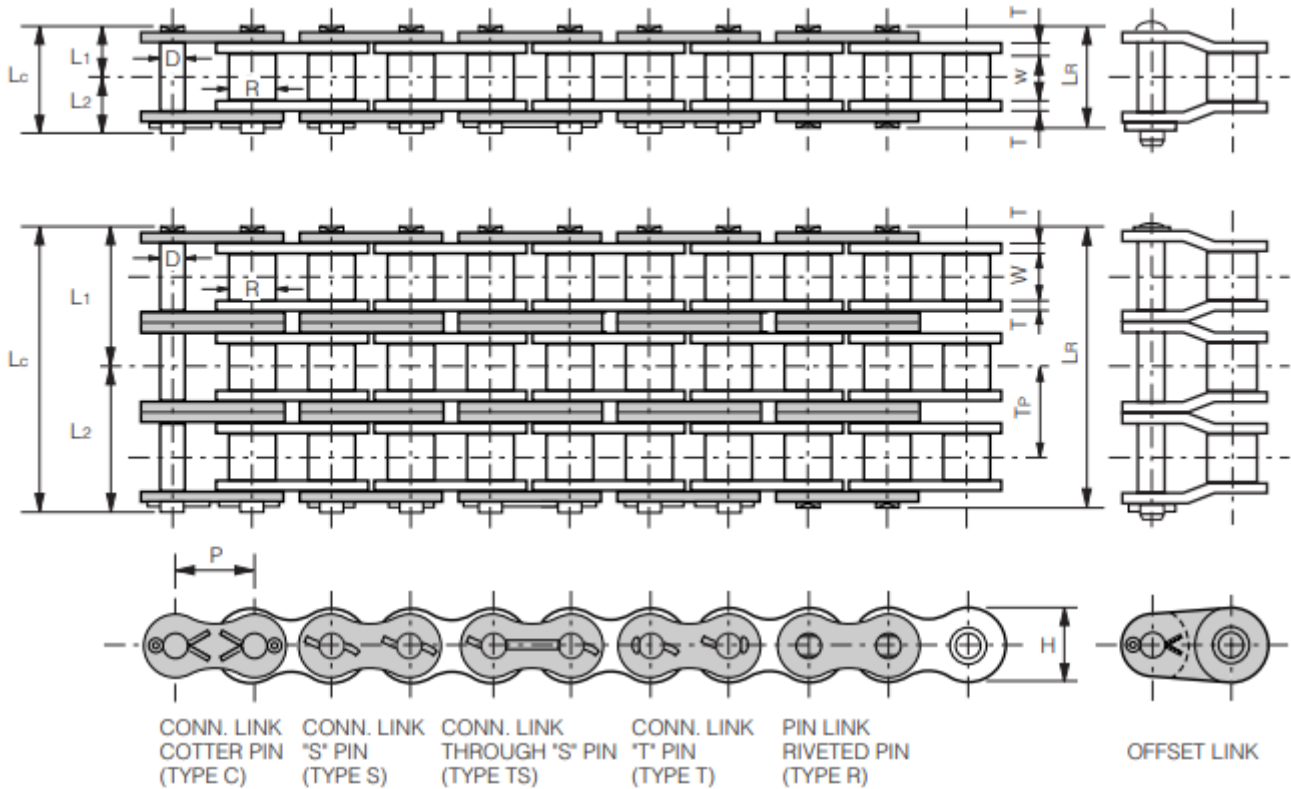

SINGLE STRAND

Chain Number (ANSI)	Dimensions – Inches										Average Ultimate Strength	Average Weight	Type of Conn. Link
	Pitch	Roller		Pin				Plate					
		Width	Dia.	Dia.	Length			Height	Thickness				
					LR	LC	L1			L2			
P	W	R	D	LR	LC	L1	L2	H	T	Lbs	Lbs/Ft	Link	
60H	3/4	1/2	0.469	0.234	1.130	1.221	0.565	0.656	0.691	0.125	12300	1.21	C
80H	1	5/8	0.625	0.312	1.398	1.528	0.699	0.829	0.921	0.156	20200	1.89	C
100H	1 1/4	3/4	0.750	0.375	1.662	1.800	0.831	0.969	1.154	0.187	30800	2.78	C
120H	1 1/2	1	0.875	0.437	2.072	2.244	1.036	1.208	1.382	0.219	41800	3.92	C
140H	1 3/4	1	1.000	0.500	2.244	2.426	1.122	1.304	1.610	0.250	54200	5.65	C
160H	2	1 1/4	1.125	0.562	2.666	2.870	1.333	1.537	1.839	0.281	68700	7.30	C
180H	2 1/4	1 13/32	1.406	0.687	2.980	3.213	1.490	1.723	2.067	0.312	83700	10.20	C
200H	2 1/2	1 1/2	1.562	0.781	3.343	3.681	1.671	2.010	2.354	0.375	117000	12.00	S
240H	3	1 7/8	1.875	0.936	4.338	4.634	2.169	2.465	2.768	0.500	163100	21.70	S

*Duplex, Triplex & Quadruplex also available

