


SUPPLY SERVICES

performance engineering products

S TYPE

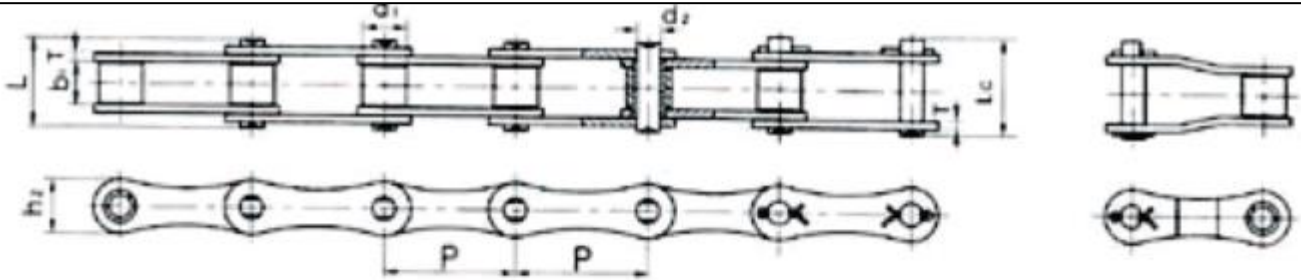


Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min	Q ₂	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
S32	29.21	11.43	15.88	4.45	26.7	28.8	13.2	1.8	8.0/1818	21.6	0.86
S42	34.93	14.27	19.05	7.00	34.3	37.0	19.8	2.8	27.0/6136	50.8	1.60
S45	41.40	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.66
S52	38.10	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.68
S55	41.40	17.78	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.80
S55R	41.40	17.78	22.23	8.90	41.0	44.0	22.4	3.5	45.0/10227	73.1	2.49
S55RH	41.40	17.78	22.23	8.90	43.2	46.4	22.4	4.0	65.0/14772	84.5	2.74
S62	41.91	19.05	26.20	5.72	40.3	43.0	17.3	2.5	26.7/6067	36.1	1.87
S77	58.34	18.26	22.23	8.90	43.2	46.4	26.2	4.0	45.0/10227	73.1	2.65
S88	66.27	22.86	28.58	8.90	49.8	53.0	26.2	4.0	45.0/10227	73.1	3.25
CA650	50.80	25.00	27.80	9.53	40.4	44.7	25.0	4.0	80.0/18182	95.5	3.49
A557	41.40	17.78	20.24	8.00	37.4	40.6	23.1	3.1	55.6/12636	74.3	2.64



CAN-AM®

C TYPE

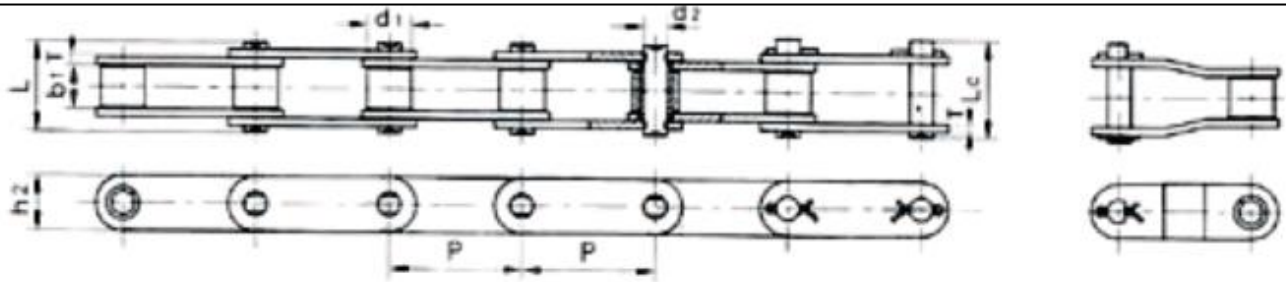

Chain No.	Pitch P	Roller diameter d_1 max	Width between inner plates b_1 min	Pin diameter d_2 max	Pin length L max	Pin length L_c max	Inner plate depth h_2 max	Plate thickness T max	Ultimate tensile strength Q min	Average tensile strength Q_0	Weight per meter q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
CA550	41.40	16.87	19.81	7.19	35.00	38.00	19.30	2.80	39.10/8886	51.2	1.94
CA550V	41.40	16.80	19.05	8.28	36.10	39.10	22.00	3.00	55.00/12499	68.7	2.24
CA555	41.40	16.87	12.70	7.19	29.70	33.10	19.30	3.10	39.10/8886	56.0	1.83
CA557	41.40	17.78	20.24	8.00	37.40	40.60	23.10	3.10	55.61/12639	74.3	2.20
CA620	42.01	17.91	24.51	7.19	41.80	45.20	20.20	3.25	39.10/8886	55.1	2.35
CA2060H	38.10	11.91	12.70	5.94	29.74	31.72	17.45	3.25	31.28/7109	40.5	1.50
CA2063H	38.10	11.89	12.70	5.94	29.40	34.20	19.30	3.25	31.28/7109	40.5	1.65
38.4R	38.40	15.88	19.05	6.92	33.80	36.40	17.30	2.50	33.00/7480	41.2	1.70
38.4V	38.40	15.88	18.00	6.92	33.80	36.40	17.30	3.00	40.00/9091	50.0	1.83
38.4VB	38.40	15.88	19.05	8.28	36.10	39.40	20.50	3.00	50.00/11363	62.5	2.17
S62F3	41.91	19.05	25.40	8.00	42.00	44.60	26.00	3.00	47.00/10796	58.7	3.12

