
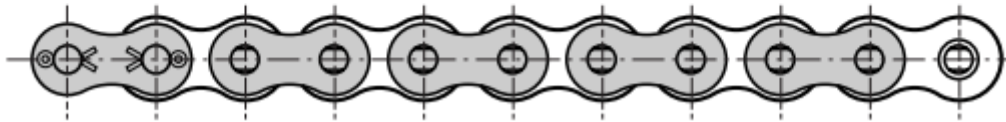


SUPPLY SERVICES

performance engineering products

SIDE BOW CHAINS

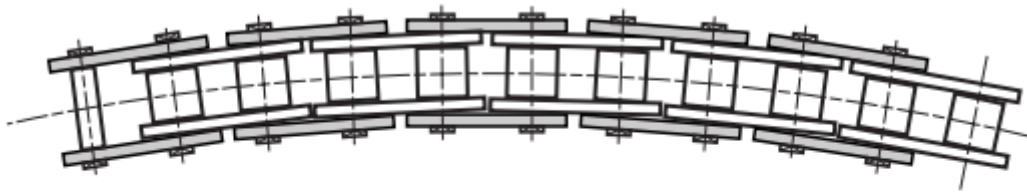

STANDARD

Chain No.	Dimensions - mm											Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate		Min.Curve Radius				
		Width	Dia.	Out Dia.	Length			Height	Thick.					
	P	W	R	D	LR	LC	L1	L2	H	T	r			
40-SB	12.70	7.95	7.92	3.58	16.9	18.9	8.5	10.4	11.7	1.5	350	14.9	1.77	0.63
50-SB	15.875	9.53	10.16	4.45	21.1	23.1	10.6	12.5	14.6	2.0	400	22.1	3.14	1.03
60-SB	19.05	12.70	11.91	5.08	26.3	28.1	13.2	14.9	17.5	2.4	500	29.4	4.22	1.46
80-SB	25.40	15.88	15.88	7.13	33.4	36.4	16.7	19.7	23.4	3.2	600	57.9	7.65	2.42

DOUBLE PITCH

Chain No.	Dimensions - mm											Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate		Min.Curve Radius				
		Width	Dia.	Out Dia.	Length			Height	Thick.					
	P	W	R	D	LR	LC	L1	L2	H	T	r			
C2040-SB	25.40	7.95	7.92	3.58	16.9	18.9	8.5	10.4	11.4	1.5	700	14.9	1.77	0.48
C2050-SB	31.75	9.53	10.16	4.45	21.1	23.1	10.6	12.5	15.0	2.0	800	22.1	3.14	0.82
C2060-SB	38.10	12.70	11.91	5.08	26.3	28.1	13.2	14.9	17.0	2.4	1000	29.4	4.22	1.20
C2042-SB	25.40	7.95	15.88	3.58	16.9	18.9	8.5	10.4	11.4	1.5	700	14.9	1.77	0.82
C2052-SB	31.75	9.53	19.05	4.45	21.1	23.1	10.6	12.5	15.0	2.0	800	22.1	3.14	1.26
C2062-SB	38.10	12.70	22.23	5.08	26.3	28.1	13.2	14.9	17.0	2.4	1000	29.4	4.22	2.01

