


# SUPPLY SERVICES

performance engineering products

## Steel Pintle Chains

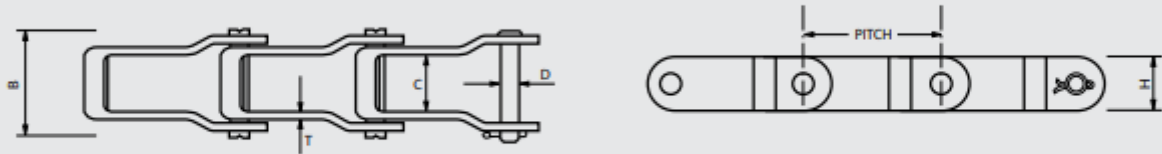

662, 667H, 667J, 667X, 667XC, 667K, 667KC, 667XH, 88K

Chain Number	Links	Average Weight	Min. Adv. Tensile Strength	Pitch	Pin Diameter	Inside Width	Height	Thickness	Overall Width
	Pcs./Foot	Lbs/Foot	Lbs		D	C	H	T	B
Inches									
662	7.2	1.05	8,500	1.664	0.281	29/32	0.720	0.125	1 5/8
667H	5.2	1.17	9,500	2.313	0.312	1	0.875	0.125	1 47/64
667X	5.3	1.86	21,000	2.250	0.437	1 1/16	0.937	0.170	1 61/64
667XC	5.3	2.10	18,000	2.250	0.437	1 1/16	0.937	0.170	1 61/64
667K	5.3	2.44	20,000	2.250	0.437	1 5/64	1.062	0.200	2 1/8
667KC	5.3	2.56	24,000	2.250	0.437	1 5/64	1.062	0.200	2 1/8
667XH	5.3	2.80	28,000	2.250	0.469	1 5/64	1.062	0.224	2 5/16
88K	4.6	2.30	20,000	2.609	0.437	1 5/64	1.062	0.200	2 1/8

