


SUPPLY SERVICES

performance engineering products

Mill Chain Rivets

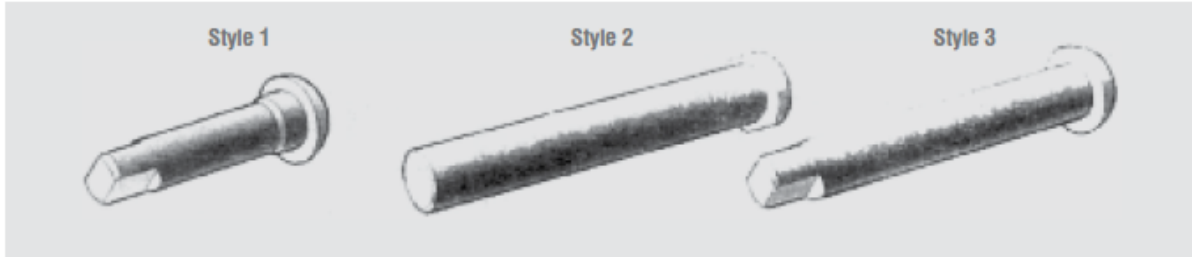

	Chain Number	Rivet Style	Rivet Dia.	Rivet Length Under Head	Approx. Weight
			inches		Lbs/100 Rivets
Trimmer Chain	SO-578	3	3/8	1 15/16	10
	MS-88	3	7/16	2 1/4	16
	81-X, 3939	3	7/16	1 59/64	12
	MO-88	3	7/16	2 1/4	16
	LXS-882	3	7/16	2 3/8	15
Malleable Chain	C102-B	3	5/8	4	50
	C-131	1	5/8	3 1/4	48
	C-188	3	1/2	2 1/2	16
	H-78, H-130, H-138	2	1/2	3 1/16	18
	H-82	2	9/16	3 5/8	28
Mill Chain	WR-78, 78-4, 130, 138, 78 Rolltop	1	1/2	2 13/16	17
	WR-78 (5") XHD	1	9/16	3 1/2	26
	WR-78 XHD	1	9/16	3 3/32	26
	WR-82	1	9/16	3 1/8	26
	WR-82XHD/WR-720S	1	3/4	3 9/16	52
	WR-124, WR-106	1	3/4	4	58
	WR-111	1	3/4	4 5/8	64
	WR-144	1	1	4 1/8	97
	WR-124XHD/WR-106XHD	1	1	4 5/8	101
	WR-150, WR-WRC-132	1	1	6	138
	WR-WRC-132XHD	1	1	6 1/2	155
	WR-WRC-157, WR-155	1	1 1/8	6 9/16	188
	WHX-157XHD, WR-159	3	1 1/4	6.54	200
	WRC-131	1	3/4	3 1/4	52
	Drag Chain	WD-102	1	3/4	8 7/8
WD-104		1	3/4	6 11/16	88.4
WD-110, WD-112		1	3/4	11 17/32	150
WD-116		1	3/4	15 13/32	198
WD-113		1	7/8	11 15/16	210
WD-118		1	7/8	16 9/16	290
WD-118-1		1	1	16.57	372
WD-118XHD		1	1	17	380
WD-120, WD-122		1	7/8	11 15/16	210
WD-120XHD		1	1	12 15/16	278
WD-480		1	7/8	14 7/16	258
WD-480XHD		1	1	14 15/16	344
WD-480-1		1	7/8	14 3/16	334

- All CAN-AM Mill Chain Rivets are through heat treated as standard
- All Super Hog and Whole Hog Chain Rivets 1" diameter and larger are supplied through and induction hardened as standard
- All Trimmer Chain Rivets are supplied Heat Treated as standard
- Other Induction Hardening & Heat Treating options are available on request, as are zinc plating and galvanizing

